

2W SMA – Coaxial Termination

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Freq. Range	Power	VSWR Max	Connector Type	Impedance
UIYCT2AS3	DC-3GHz	2W	1.07	SMA Male	50 Ω
UIYCT2ASF3		2W	1.07	SMA Female	50 Ω
UIYCT2AS6	DC-6GHz	2W	1.10	SMA Male	50 Ω
UIYCT2ASF6		2W	1.10	SMA Female	50 Ω
UIYCT2AS8	DC-8GHz	2W	1.15	SMA Male	50 Ω
UIYCT2ASF8		2W	1.15	SMA Female	50 Ω
UIYCT2AS124	DC-12.4GHz	2W	1.2	SMA Male	50 Ω
UIYCT2ASF124		2W	1.2	SMA Female	50 Ω
UIYCT2AS18	DC-18GHz	2W	1.3	SMA Male	50 Ω

- ² List are specify frequency range and other ranges available.
² Please enter below information when inquiry and mark * is must.
 * 1. Power handling, Attenuation Value
 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
 3. Other special request if have (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

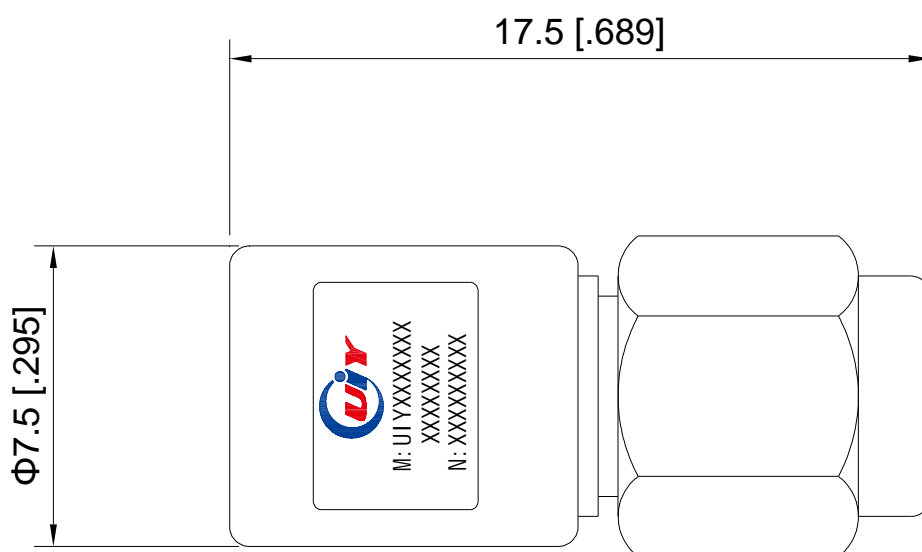

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5