

300W – 18GHz Coaxial Termination

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Freq. Range	Power	VSWR Max	Connector Type	Impedance
UIYCT300AN8	DC-8GHz	300W	1.25	N Male	50 Ω
UIYCT300ANF8		300W	1.25	N Female	50 Ω
UIYCT300AN124	DC-12.4GHz	300W	1.35	N Male	50 Ω
UIYCT300ANF124		300W	1.35	N Female	50 Ω
UIYCT300AN18	DC-18GHz	300W	1.45	N Male	50 Ω
UIYCT300ANF18		300W	1.45	N Female	50 Ω

- 2 List are specify frequency range and other ranges available.
 2 Please enter below information when inquiry and mark * is must.
 * 1. Power handling, Attenuation Value
 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
 3. Other special request if have (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

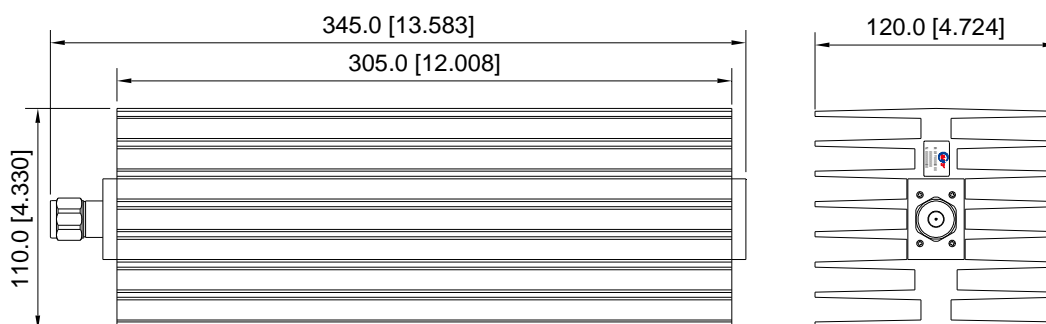

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

