



50W - Coaxial Termination

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range	Power	VSWR Max	Connector Type	Impedance
UIYCT50AN3	DC-3GHz	50W	1.15	N Male	50 Ω
UIYCT50ANF3	DC-3GHz	50W	1.15	N Female	50 Ω
UIYCT50AN6	DC-6GHz	50W	1.25	N Male	50 Ω
UIYCT50ANF6	DC-6GHz	50W	1.25	N Female	50 Ω

² Listed are specific frequency ranges and tailor-made ranges available.

Mechanical Drawing

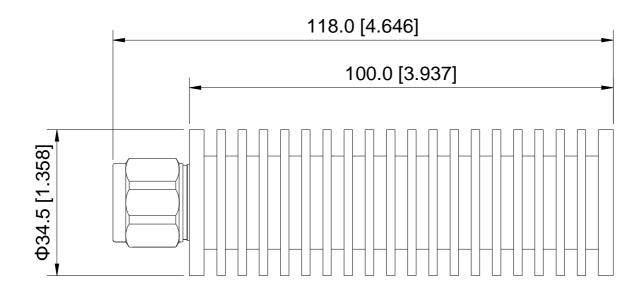

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.1

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China. Tel: +86-755-83748888 +86-755-25999990 Fax: +86-755-25999959

Web: www.uiy.com
E-mail: sales@uiy.com

Please provide the information below when inquiring and mark * is required.

^{* 1.} Power handling

^{2.} Connect type (SMA Male/ Female, N Male/ Female, etc.)

^{3.} Other special requests (VSWR, Temperature, Dimension, etc.)