

50W 18GHz – SMA Coaxial Termination

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Guaranteed for one year standard.

RF Characteristics

| Model Number | Freq. Range | VSWR Max | Power | Connector Type | Impedance |
|---------------|-------------|----------|-------|----------------|-----------|
| UIYCT50AS124 | DC-12.4GHz | 1.3 | 50W | SMA Male | 50 Ω |
| UIYCT50ASF124 | DC-12.4GHz | 1.3 | 50W | SMA Female | 50 Ω |
| UIYCT50AS18 | DC-18GHz | 1.35 | 50W | SMA Male | 50 Ω |
| UIYCT50ASF18 | DC-18GHz | 1.35 | 50W | SMA Female | 50 Ω |

² List are specify frequency range and other ranges available.
² Please enter below information when inquiry and mark * is must.
 * 1. Power handling
 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
 3. Other special request if have (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

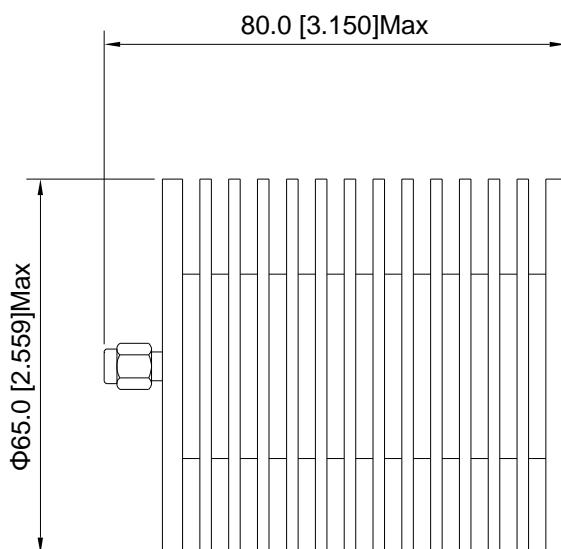

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5.0