



5W 12.4GHz – Coaxial Termination

Design Features

- High RF performance, ultra-competitive price.
- Military, space and commercial applications.
- Custom design available upon request.
- Support one year standard warranty.

RF Characteristics


Mo	del Number	Freq. Range	Power	VSWR Max	Connector Type	Impedance
UIY	CT5AS124	DC-12.4GHz	5W	1.15	SMA Male	50 Ω
UIY	CT5ASF124	DC-12.4GHz	5W	1.15	SMA Female	50 Ω
 Listed are specific frequency ranges and tailor-made ranges available. Please provide the information below when inquiring and mark * is required. * 1. Power handling 						

* 1. Power handling

2. Connect type (SMA Male/ Female, N Male/ Female, etc.)

3. Other special requests (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

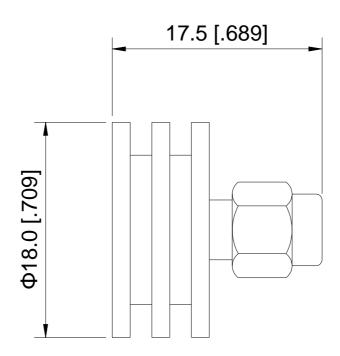

Unit: mm/ inch, General part tolerance is \pm 2% unless otherwise stated.

Ver. 5