

## 70 to 130MHz – Drop in Circulator

### Design Features

- ◆ Can be dual junction or multiple for high isolation.
- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

### RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYDC100100A70T75	70 ~ 75	1.2	16	1.45	500	500	TAB	0 ~ +70
UIYDC100100A75T85	75 ~ 85	1.2	16	1.45	500	500	TAB	0 ~ +70
UIYDC100100A76T96	76 ~ 96	1.2	16	1.45	500	500	TAB	0 ~ +70
UIYDC100100A80T90	80 ~ 90	0.8	16	1.45	500	500	TAB	0 ~ +70
UIYDC100100A88T108	88 ~ 108	0.8	17	1.35	500	500	TAB	0 ~ +70
UIYDC100100A110T130	110 ~ 130	0.5	20	1.25	500	500	TAB	0 ~ +70

<sup>2</sup> Listed are specific frequency ranges and tailor-made ranges are available.


<sup>2</sup> Please provide the information below when inquiring and mark \* is required.

\* 1. The specific frequency ranges

\* 2. Power handling (Forward, Reverse, Peak, etc.)

3. Other special requests (Insertion Loss, Isolation, VSWR, Temperature, Dimension etc.)

### Mechanical Drawing

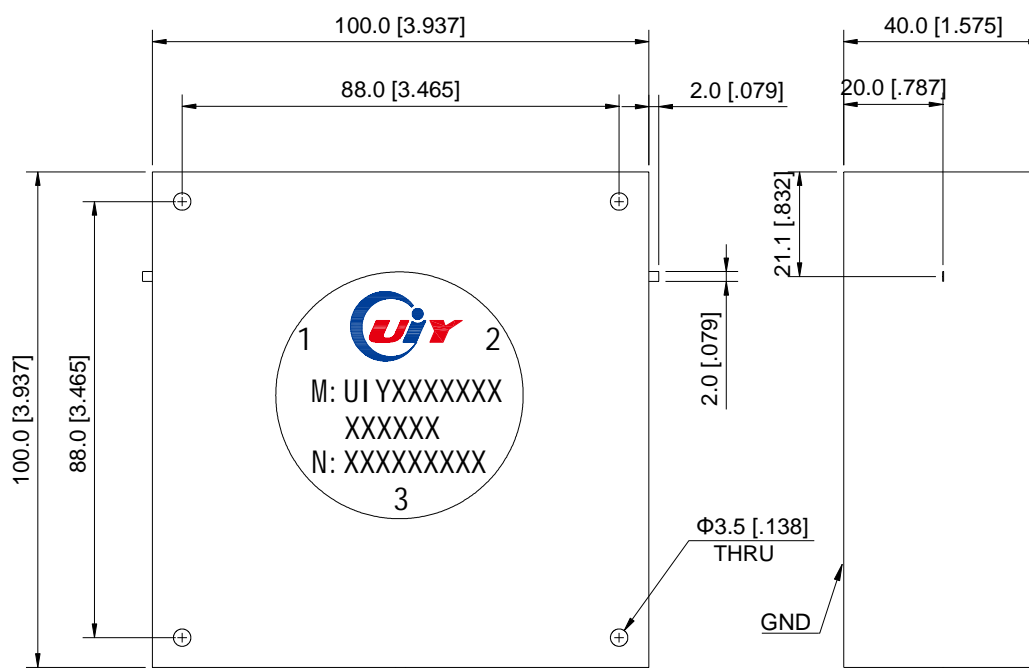

Unit: mm/ inch, General part tolerance is  $\pm 2\%$  unless otherwise stated.

Ver. 5

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China. Web: [www.uiy.com](http://www.uiy.com)

Tel: +86-755-83748888 +86-755-25999990 Fax: +86-755-25999959 E-mail: [sales@uiy.com](mailto:sales@uiy.com)