

250 to 1300MHz – Drop in Circulator

Design Features


- ◆ Can be dual junction even three for high isolation.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYDC4550A250T260	250 ~ 260	0.6	20	1.25	300	300	TAB	-30 ~ +70
UIYDC4550A289T359	289 ~ 359	0.5	20	1.25	300	300	TAB	-30 ~ +70
UIYDC4550A300T400	300 ~ 400	0.6	17	1.3	100	100	TAB	-20 ~ +60
UIYDC4550A350T450	350 ~ 450	0.6	20	1.25	100	100	TAB	-20 ~ +60
UIYDC4550A350T400	350 ~ 400	0.35	23	1.2	100	100	TAB	-30 ~ +70
UIYDC4550A380T500	380 ~ 500	0.5	20	1.25	100	100	TAB	-20 ~ +60
UIYDC4550A400T500	400 ~ 500	0.45	20	1.25	300	300	TAB	-30 ~ +70
UIYDC4550A400T430	400 ~ 430	0.25	25	1.15	300	300	TAB	-30 ~ +70
UIYDC4550A440T470	440 ~ 470	0.25	25	1.15	300	300	TAB	-30 ~ +70

- ◇ List are specify frequency range and other ranges available.
- ◇ Please enter below information when inquiry and mark * is must.
 - * 1. The specific frequency range
 - * 2. Power handling (Forward, Reverse, Peak, etc.)
 - * 3. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

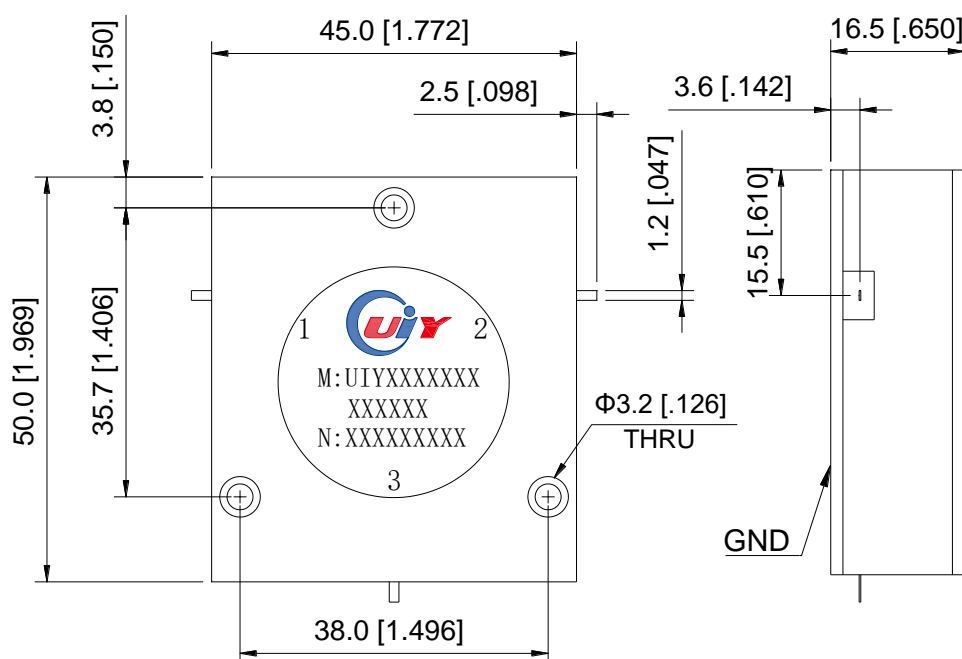

Unit: mm/ inch, General part tolerance is ± 0.2 mm unless otherwise stated.

Ver. 5