

5 to 25GHz – 4 Port Dual Junction Drop in Circulator


Design Features

- ◆ Can be Dual Junction or Multiple for high isolation.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss (1-2 & 3-4) Max(dB)	Isolation (2-1 & 4-3) Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYDDC1716A4P5T55	5.0 ~ 5.5	1.0	36	1.3	65	65	TAB	-40 ~ +85
UIYDDC1716A4P54T58	5.4 ~ 5.8	1.0	36	1.3	65	65	TAB	-40 ~ +85
UIYDDC1716A4P57T59	5.7 ~ 5.9	0.7	40	1.25	65	65	TAB	-40 ~ +85
UIYDDC1716A4P58T62	5.8 ~ 6.2	1.0	40	1.25	30	30	TAB	-40 ~ +85
UIYDDC1716A4P6T8	6.0 ~ 8.0	1.2	36	1.3	30	30	TAB	-40 ~ +85
UIYDDC1716A4P7T9	7.0 ~ 9.0	1.0	36	1.3	30	30	TAB	-40 ~ +85
UIYDDC1716A4P71T95	7.1 ~ 9.5	1.2	36	1.3	30	30	TAB	-55 ~ +85
UIYDDC1716A4P79T84	7.9 ~ 8.4	0.6	46	1.2	30	30	TAB	-55 ~ +85
UIYDDC1716A4P8T12	8.0 ~ 12.0	1.0	36	1.3	30	30	TAB	-55 ~ +85
UIYDDC1716A4P85T95	8.5 ~ 9.5	0.6	46	1.2	30	30	TAB	-55 ~ +85
UIYDDC1716A4P9T10	9.0 ~ 10.0	0.6	46	1.2	30	30	TAB	-55 ~ +85
UIYDDC1716A4P10T11	10.0 ~ 11.0	0.6	46	1.2	30	30	TAB	-55 ~ +85
UIYDDC1716A4P10T13	10.0 ~ 13.0	1.0	40	1.25	30	30	TAB	-55 ~ +85
UIYDDC1716A4P10T15	10.0 ~ 15.0	1.0	36	1.35	30	30	TAB	-55 ~ +85
UIYDDC1716A4P115T185	11.5 ~ 18.5	1.4	32	1.45	30	30	TAB	-55 ~ +85
UIYDDC1716A4P12T18	12.0 ~ 18.0	1.2	36	1.35	30	30	TAB	-55 ~ +85
UIYDDC1716A4P1375T145	13.75 ~ 14.5	0.6	46	1.2	30	30	TAB	-55 ~ +85
UIYDDC1716A4P138T178	13.8 ~ 17.8	1.0	36	1.3	30	30	TAB	-55 ~ +85
UIYDDC1716A4P155T165	15.5 ~ 16.5	1.0	40	1.25	30	30	TAB	-55 ~ +85
UIYDDC1716A4P16T18	16.0 ~ 18.0	1.2	40	1.25	30	30	TAB	-55 ~ +85
UIYDDC1716A4P18T20	18.0 ~ 20.0	1.2	40	1.25	30	30	TAB	-55 ~ +85
UIYDDC1716A4P192T212	19.2 ~ 21.2	1.2	36	1.3	30	30	TAB	-55 ~ +85
UIYDDC1716A4P21T23	21.0 ~ 23.0	1.2	36	1.3	30	30	TAB	-55 ~ +85

Mechanical Drawing

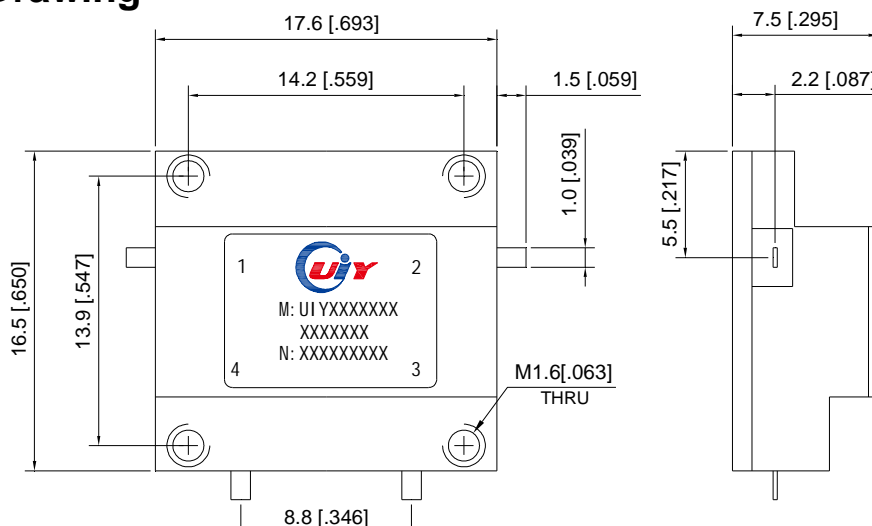

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.2