

4 to 7GHz – 4 Port Dual Junction Drop in Circulator

Design Features

- ◆ Can be Dual Junction or Multiple for high isolation.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss (1-2 & 3-4) Max(dB)	Isolation (2-1 & 4-3) Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYDDC2420A4P45T5	4.5 ~ 5.0	0.8	40	1.25	60	60	TAB	-40 ~ +85
UIYDDC2420A4P47T52	4.7 ~ 5.2	0.8	40	1.25	60	60	TAB	-40 ~ +85
UIYDDC2420A4P5T58	5.0 ~ 5.8	0.8	40	1.25	60	60	TAB	-40 ~ +85
UIYDDC2420A4P5T6	5.0 ~ 6.0	1.0	36	1.3	60	60	TAB	-40 ~ +85
UIYDDC2420A4P52T59	5.2 ~ 5.9	0.8	40	1.2	60	60	TAB	-40 ~ +85
UIYDDC2420A4P54T59	5.4 ~ 5.9	0.8	45	1.2	60	60	TAB	-40 ~ +85
UIYDDC2420A4P55T6	5.6 ~ 6.0	0.6	45	1.2	60	60	TAB	-40 ~ +85
UIYDDC2420A4P57T59	5.7 ~ 5.9	0.6	45	1.2	60	60	TAB	-40 ~ +85
UIYDDC2420A4P57T65	5.7 ~ 6.5	1.0	40	1.25	60	60	TAB	-40 ~ +85
UIYDDC2420A4P6T7	6.0 ~ 7.0	0.7	45	1.2	60	60	TAB	-40 ~ +85
UIYDDC2420A4P635T655	6.35 ~ 6.55	0.6	45	1.2	60	60	TAB	-40 ~ +85

² Listed are specific frequency ranges and tailor-made ranges are available.


² Please provide the information below when inquiring and mark * is required.

* 1. The specific frequency ranges

* 2. Power handling (Forward, Reverse, Peak, etc.)

3. Other special requests (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

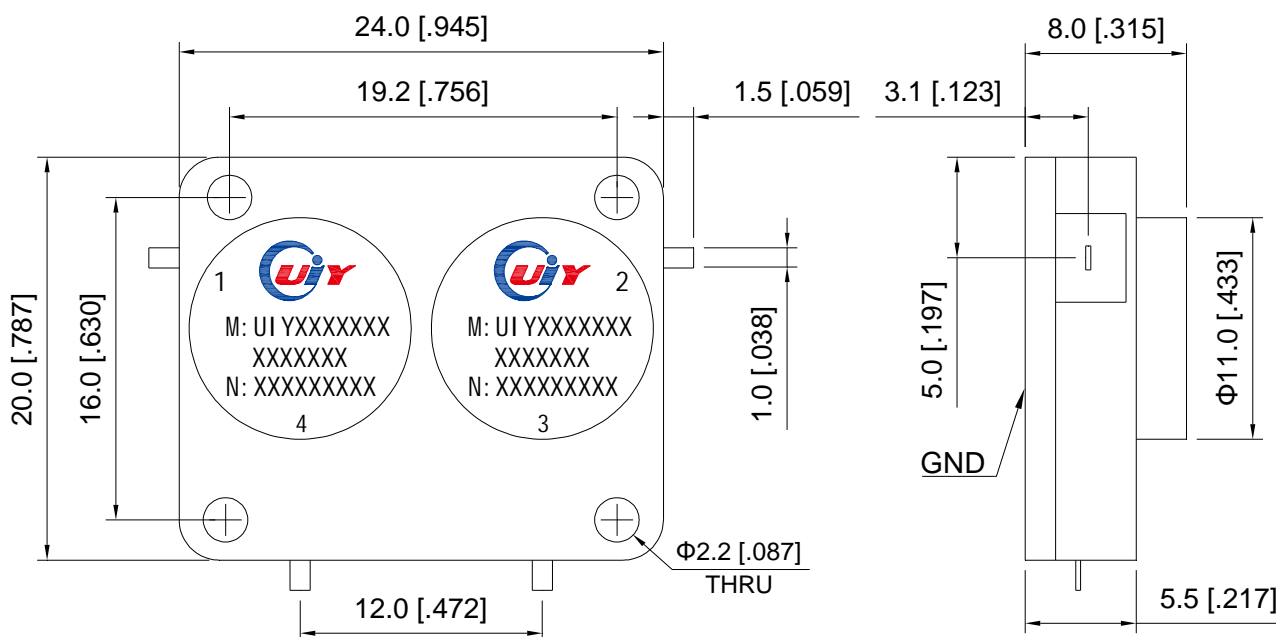

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5