

# 300 to 1300MHz – 4 Port Dual Junction Drop in Circulator

## Design Features


- ◆ Can be dual junction even three for high isolation.
- ◆ Military, space and commercial applications.
- ◆ Guaranteed for one year standard.
- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.

## RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss (1-2 & 3-4) Max(dB)	Isolation (2-1 & 4-3) Min(dB)	VSWR Max	Forward Power (W)	Reverse Power (W)	Connector Type	Temp.(°C)
UIYDDC7038A4P309T339	309 ~ 339	1.0	40	1.25	300	300	TAB	-20 ~ +65
UIYDDC7038A4P350T370	350 ~ 370	0.6	45	1.2	300	300	TAB	-20 ~ +65
UIYDDC7038A4P390T410	390 ~ 410	0.6	45	1.2	300	300	TAB	-30 ~ +70
UIYDDC7038A4P400T470	400 ~ 470	1.0	40	1.25	300	300	TAB	-30 ~ +70
UIYDDC7038A4P440T470	440 ~ 470	0.6	45	1.2	300	300	TAB	-30 ~ +70
UIYDDC7038A4P470T570	470 ~ 570	0.7	38	1.25	300	300	TAB	-20 ~ +65
UIYDDC7038A4P570T670	570 ~ 670	0.8	40	1.25	300	300	TAB	-20 ~ +65
UIYDDC7038A4P670T770	670 ~ 770	0.8	40	1.25	300	300	TAB	-20 ~ +65
UIYDDC7038A4P770T860	770 ~ 860	0.7	45	1.2	300	300	TAB	-20 ~ +65
UIYDDC7038A4P600T800	600 ~ 800	1.0	36	1.3	300	300	TAB	-30 ~ +70

2 List are specify frequency range and other ranges available.  
 2 Please enter below information when inquiry and mark \* is must.  
 \* 1. The specific frequency range  
 \* 2. Power handling (Forward, Reverse, Peak, etc.)  
 3. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

## Mechanical Drawing

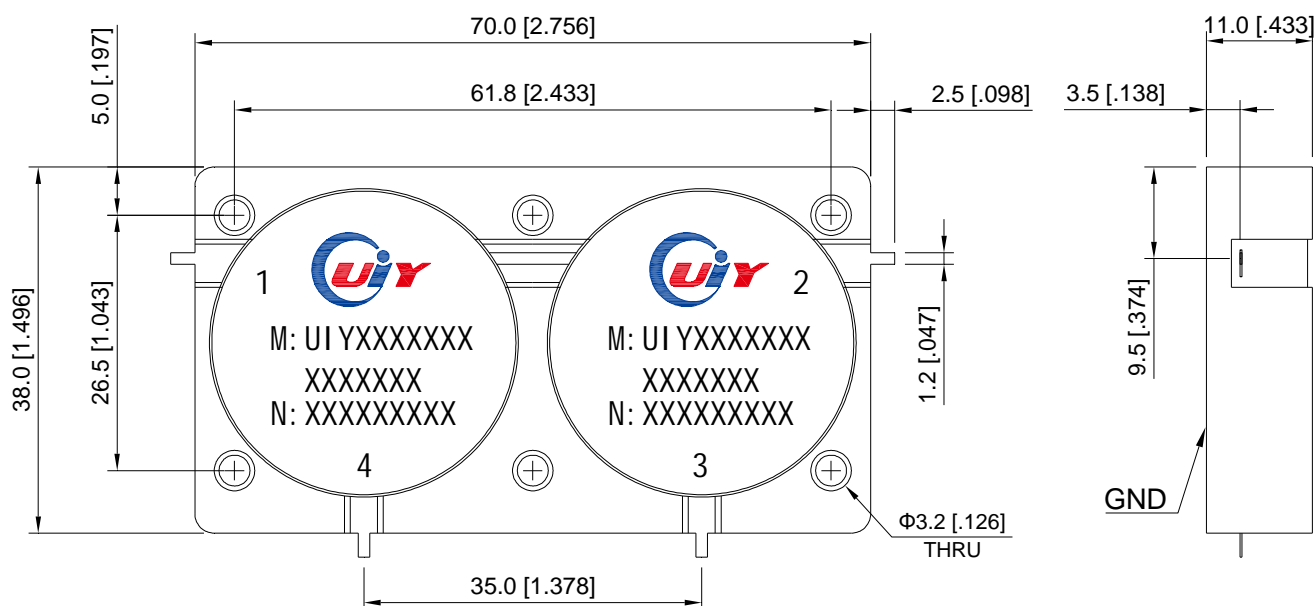

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5