

410 to 3500MHz – Dual Junction Drop in Isolator

Design Features


- ◆ Can be dual junction even three for high isolation.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYDDI5025A410T420	410 ~ 420	1.0	40	1.25	200	30	TAB	-20 ~ +65
UIYDDI5025A430T440	430 ~ 440	1.0	40	1.25	200	30	TAB	-20 ~ +65
UIYDDI5025A490T510	490 ~ 510	1.0	40	1.25	200	30	TAB	-20 ~ +65
UIYDDI5025A600T640	600 ~ 640	0.8	40	1.25	200	30	TAB	-20 ~ +65
UIYDDI5025A700T750	700 ~ 750	0.6	45	1.2	200	30	TAB	-30 ~ +70
UIYDDI5025A700T800	700 ~ 800	0.8	40	1.25	200	30	TAB	-30 ~ +70
UIYDDI5025A800T1000	800 ~ 1000	1.2	36	1.3	200	30	TAB	-30 ~ +70
UIYDDI5025A860T960	860 ~ 960	0.7	40	1.25	200	30	TAB	-30 ~ +70
UIYDDI5025A869T894	869 ~ 894	0.6	45	1.2	200	30	TAB	-30 ~ +70
UIYDDI5025A925T960	925 ~ 960	0.6	45	1.2	200	30	TAB	-30 ~ +70
UIYDDI5025A960T1230	960 ~ 1230	1.0	36	1.3	200	30	TAB	-30 ~ +70
UIYDDI5025A1200T1300	1200 ~ 1300	0.6	45	1.2	200	30	TAB	-40 ~ +85
UIYDDI5025A1500T1700	1500 ~ 1700	0.6	45	1.25	200	30	TAB	-30 ~ +70
UIYDDI5025A1700T1900	1700 ~ 1900	0.6	45	1.25	200	30	TAB	-30 ~ +70
UIYDDI5025A1710T2170	1710 ~ 2170	1.0	36	1.3	200	30	TAB	-30 ~ +70
UIYDDI5025A1800T2200	1800 ~ 2200	1.0	36	1.3	200	30	TAB	-30 ~ +70
UIYDDI5025A1805T1880	1805 ~ 1880	0.6	45	1.2	200	30	TAB	-30 ~ +70
UIYDDI5025A1900T2200	1900 ~ 2200	0.7	42	1.25	200	30	TAB	-30 ~ +70
UIYDDI5025A1920T1990	1920 ~ 1990	0.6	45	1.2	200	30	TAB	-30 ~ +70
UIYDDI5025A2000T2500	2000 ~ 2500	1.0	40	1.25	200	30	TAB	-30 ~ +70
UIYDDI5025A2300T2500	2300 ~ 2500	0.6	45	1.2	200	30	TAB	-40 ~ +85
UIYDDI5025A2300T2700	2300 ~ 2700	0.8	40	1.25	200	30	TAB	-30 ~ +70
UIYDDI5025A2400T2600	2400 ~ 2600	0.6	45	1.2	200	30	TAB	-30 ~ +70
UIYDDI5025A2500T2700	2500 ~ 2700	0.6	45	1.2	200	30	TAB	-40 ~ +85
UIYDDI5025A2700T3100	2700 ~ 3100	0.8	40	1.25	200	30	TAB	-30 ~ +70
UIYDDI5025A3150T3250	3150 ~ 3250	0.6	45	1.2	200	30	TAB	-40 ~ +85

- ² List are specify frequency range and other ranges available.
² Please enter below information when inquiry and mark * is must.
 * 1. The specific frequency range
 * 2. Power handling (Forward, Reverse, Peak, etc.)

Mechanical Drawing

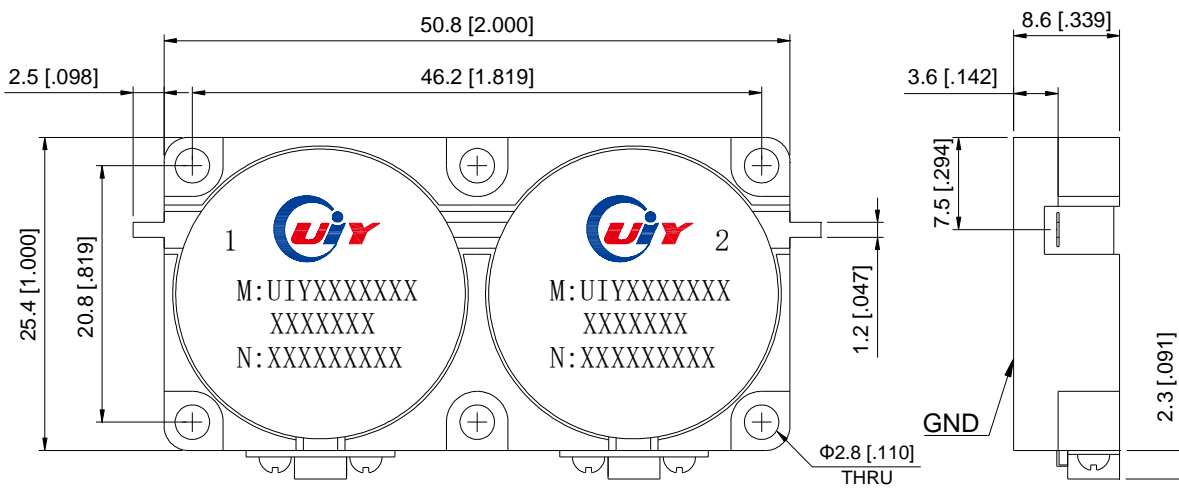

Unit: mm/ inch, General part tolerance is ±0.2mm unless otherwise stated.

Ver. 5