

200 to 1875MHz – Drop in Isolator


Design Features

- ◆ Can be dual junction even three for high isolation.
- ◆ Military, space and commercial applications.
- ◆ Guaranteed for one year standard.
- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.

RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYDI3546A220T240	220 ~ 240	0.65	18	1.3	300	100	TAB	-20 ~ +65
UIYDI3546A240T260	240 ~ 260	0.5	18	1.3	300	100	TAB	-20 ~ +65
UIYDI3546A260T280	260 ~ 280	0.5	20	1.25	300	100	TAB	-20 ~ +65
UIYDI3546A309T339	309 ~ 339	0.4	20	1.25	300	150	TAB	-20 ~ +65
UIYDI3546A350T370A30	350 ~ 370	0.35	21	1.2	300	100-30dB	TAB	-20 ~ +65
UIYDI3546A390T410	390 ~ 410	0.3	23	1.2	300	100	TAB	-30 ~ +70
UIYDI3546A400T470	400 ~ 470	0.4	20	1.25	300	100	TAB	-30 ~ +70
UIYDI3546A413T419A30	413 ~ 419	0.3	30	1.15	300	100-30dB	TAB	-30 ~ +70
UIYDI3546A419T425A30	419 ~ 425	0.3	30	1.15	300	100-30dB	TAB	-30 ~ +70
UIYDI3546A440T470	440 ~ 470	0.3	23	1.2	300	150	TAB	-30 ~ +70
UIYDI3546A470T570	470 ~ 570	0.45	19	1.25	300	100	TAB	-20 ~ +65
UIYDI3546A570T670	570 ~ 670	0.3	23	1.2	300	100	TAB	-20 ~ +65
UIYDI3546A600T800	600 ~ 800	0.5	18	1.3	300	100	TAB	-30 ~ +70
UIYDI3546A670T770	670 ~ 770	0.3	23	1.2	300	100	TAB	-20 ~ +65
UIYDI3546A700T900	700 ~ 900	0.4	20	1.25	300	100	TAB	-30 ~ +70
UIYDI3546A700T1000	700 ~ 1000	0.6	16	1.4	300	100	TAB	-20 ~ +65
UIYDI3546A770T860	770 ~ 860	0.3	23	1.2	300	100	TAB	-40 ~ +85
UIYDI3546A860T872	860 ~ 872	0.3	30	1.15	300	100	TAB	-30 ~ +70
UIYDI3546A900T930	900 ~ 930	0.3	30	1.15	300	100	TAB	-30 ~ +70
UIYDI3546A1000T1300	1000 ~ 1300	0.4	20	1.25	300	100	TAB	-40 ~ +85
UIYDI3546A1296T1298	1296 ~ 1298	0.3	25	1.15	300	100	TAB	-40 ~ +85

Mechanical Drawing

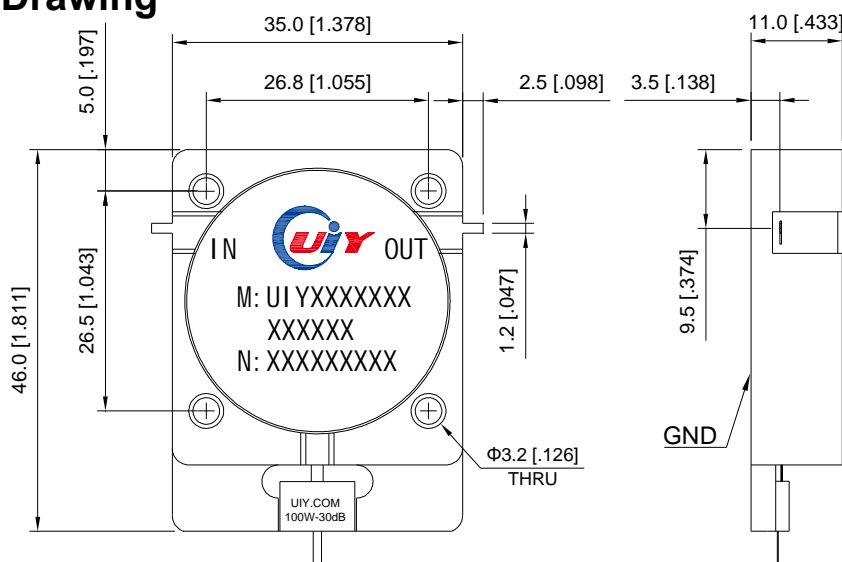

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5