

## 617 to 698MHz – Duplexer / Diplexer

### Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

### RF Characteristics


Model Number	Freq. Range (MHz)		Insertion Loss Max(dB)	Ripple (dB)	Isolation Min(dB)	VSWR Max	Power(W)	Connector Type	Temp.(°C)
UIYDX100160A617T698SF	TX	663 ~ 698	1.5	0.8	60	1.3	20	SMA-F	-30 ~ +70
	RX	617 ~ 652							
UIYDX100160A617T698NF	TX	663 ~ 698	1.5	0.8	60	1.3	20	N-F	-30 ~ +70
	RX	617 ~ 652							

2 Listed are specific frequency ranges and tailor-made ranges are available.

2 Please provide the information below when inquiring and mark \* is must.

- \* 1. The specific frequency range TX and RX
- \* 2. Insertion Loss, Isolation, VSWR
- 3. Other special requests (Power handling, Temperature, Dimension, etc.)

### Mechanical Drawing

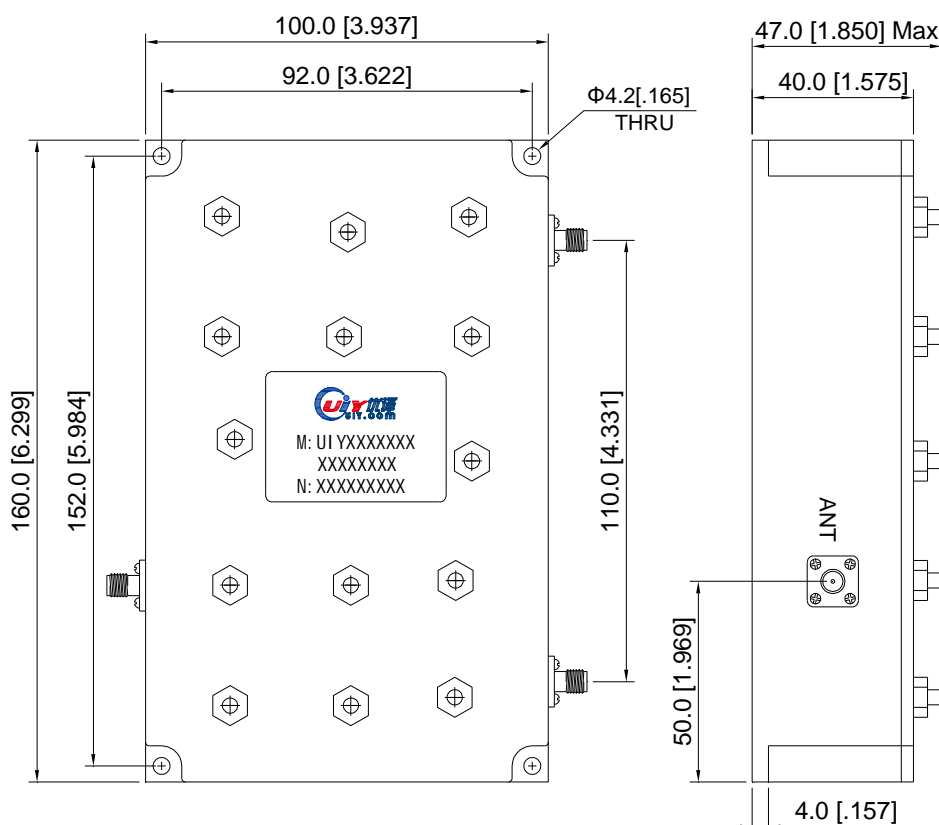

Unit: mm/ inch, General part tolerance is  $\pm 2\%$  unless otherwise stated.

Ver. 5