

151 to 160MHz – Duplexer / Diplexer

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range (MHz)		Insertion Loss Max(dB)	Ripple Max(dB)	Isolation Min(dB)	VSWR Max	Power (W)	Connector Type	Temp.(°C)
UIYDX148310A151T160SF	TX	151.06~154.125	1.0	0.6	65	1.35	50	SMA-F	-20 ~ +65
	RX	158.765~ 160.09							
UIYDX148310A151T160NF	TX	151.06~154.125	1.0	0.6	65	1.35	50	N-F	-20 ~ +65
	RX	158.765~ 160.09							

² Listed are specific frequency ranges and tailor-made ranges are available.
² Please provide the information below when inquiring and mark * is must.
 * 1. The specific frequency range TX and RX
 * 2. Insertion Loss, Isolation, VSWR
 3. Other special requests (Power handling, Temperature, Dimension, etc.)

Mechanical Drawing

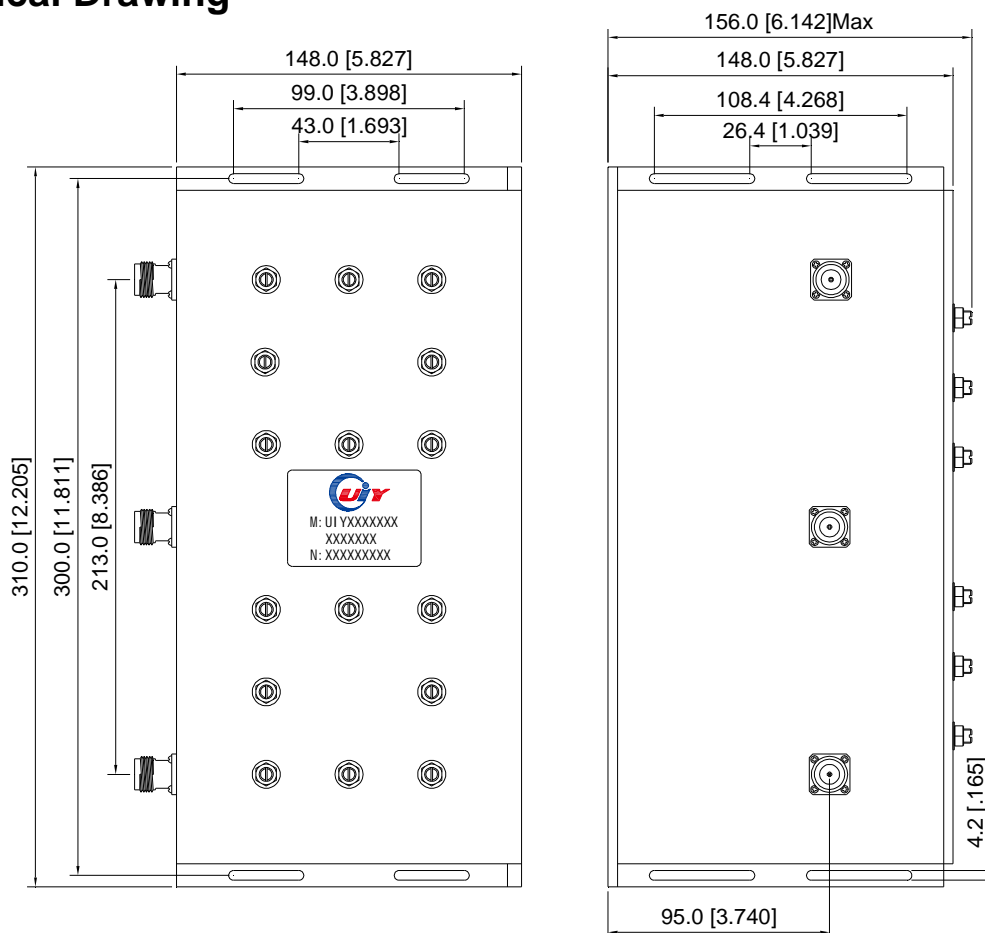

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5