

400 to 470MHz – Duplexer / Diplexer

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range (MHz)		Insertion Loss Max(dB)	Ripple Max(dB)	Isolation Min(dB)	VSWR Max	Power(W)	Connector Type	Temp.(°C)
	CH1	CH2							
UIYDX218165A400T415NF	CH1	400 ~ 405	1.5	0.8	80	1.3	100	N-F	-30 ~ +70
	CH2	410 ~ 415							
UIYDX218165A410T425NF	CH1	410 ~ 415	1.5	0.8	80	1.3	100	N-F	-30 ~ +70
	CH2	420 ~ 425							
UIYDX218165A412T427NF	CH1	412 ~ 417	1.5	0.8	80	1.3	100	N-F	-30 ~ +70
	CH2	422 ~ 427							
UIYDX218165A440T455SF	CH1	440 ~ 445	1.5	0.8	80	1.3	100	SMA-F	-30 ~ +70
	CH2	450 ~ 455							
UIYDX218165A4515T465NF	CH1	451.5 ~ 456.5	1.5	0.8	80	1.3	100	N-F	-30 ~ +70
	CH2	461.5 ~ 466.5							
UIYDX218165A455T470NF	CH1	465 ~ 470	1.5	0.8	80	1.3	100	N-F	-30 ~ +70
	CH2	455 ~ 460							

² Listed are specific frequency ranges and tailor-made ranges are available.


² Please provide the information below when inquiring and mark * is must.

* 1. The specific frequency range TX and RX

* 2. Insertion Loss, Isolation, VSWR

3. Other special requests (Power handling, Temperature, Dimension etc.)

Mechanical Drawing

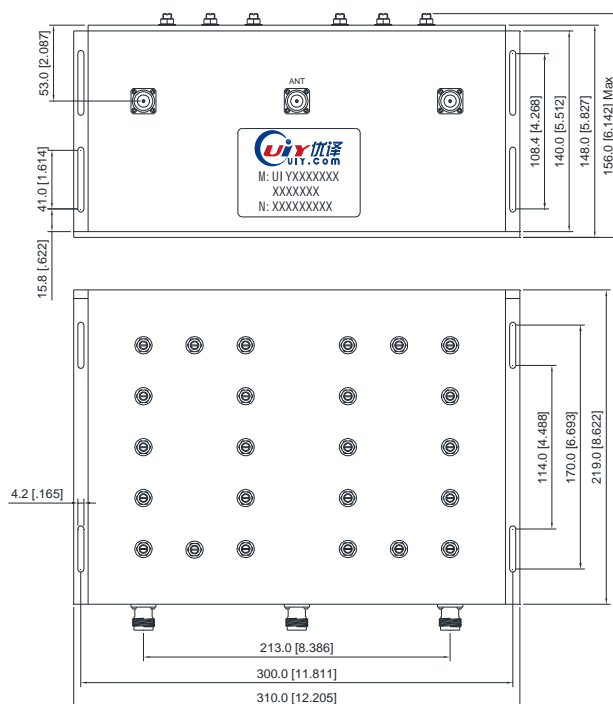

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.1