

## 3 to 12GHz – High Pass Filter

### Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

### RF Characteristics

Model Number	Pass Band (GHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYHPF3433A3T12SF	3.0 ~ 12.0	1.0	1.8	50dB @DC-2.5GHz	30	SMA-F	-40 ~ +85

<sup>2</sup> Listed are specific frequency ranges and other ranges are available.  
<sup>2</sup> Please provide the below informations when inquiring and mark \* is required.  
 \* 1. The specific pass band frequency range  
 \* 2. The specific rejection and frequency  
 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

### Mechanical Drawing

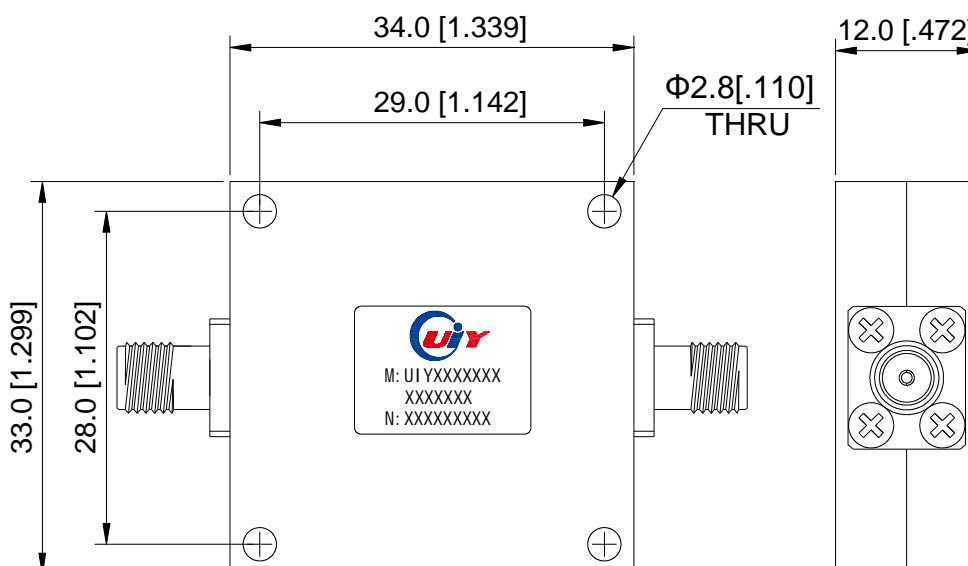

Unit: mm/ inch, General part tolerance is  $\pm 0.2$ mm unless otherwise stated.

Ver. 5