

5 to 95MHz – Low Pass Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYLPF16054A5T95SF	5.0 ~ 95.0	1.5	1.4	40dB @105 ~ 500MHz	10	SMA-F	-25 ~ +55
UIYLPF16054A5T95NF	5.0 ~ 95.0	1.5	1.4	40dB @105 ~ 500MHz	10	N-F	-25 ~ +55

- 2 Listed are specific frequency ranges and other ranges are available.
- 2 Please provide the below information when inquiring and mark * is required.
- * 1. The specific pass band frequency range
 - * 2. The specific rejection and frequency
 - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

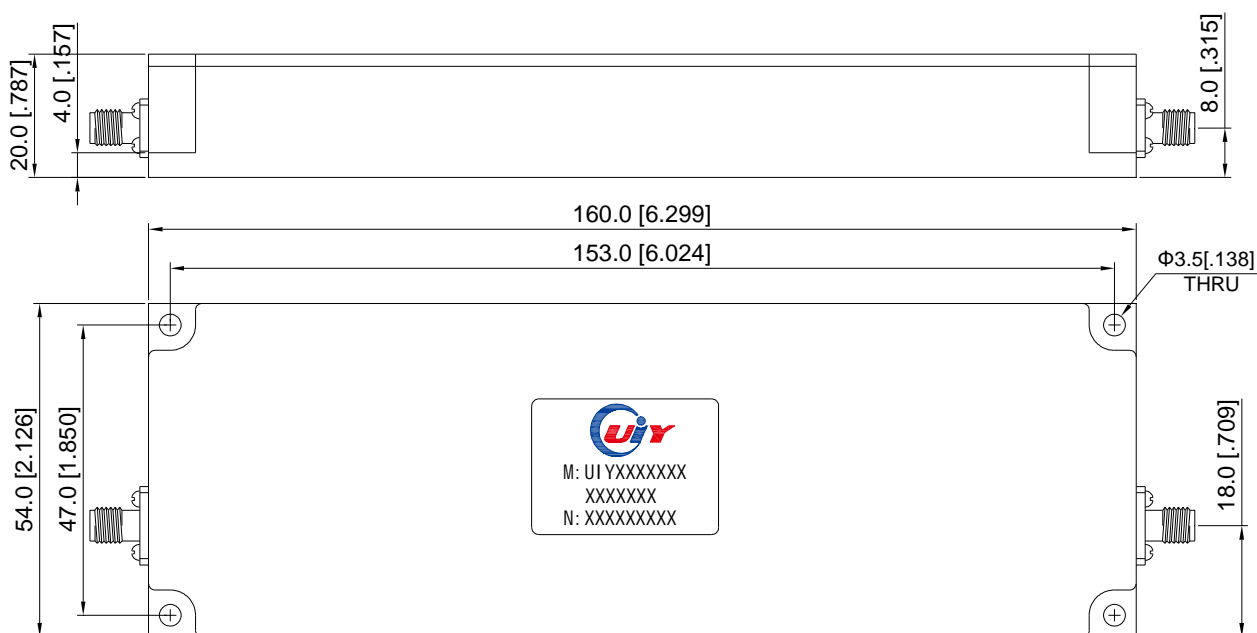

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.0