



## DC-12GHz - Low Pass Filter

## **Design Features**


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- Custom design available upon request.
- Support one year standard warranty.

## **RF Characteristics**

Model Number	Pass Band (GHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYLPF2419A12SF	DC-12.0	1.0	2.0	50dB @14.0~20.0GHz	15	SMA-F	-40 ~ +85

- <sup>2</sup> Listed are specific frequency ranges and tailor-made ranges are available.
- Please provide the below information when inquiring and mark \* is required.
  - \* 1. The specific pass band frequency range
  - \* 2. The specific rejection and frequency
  - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

## **Mechanical Drawing**

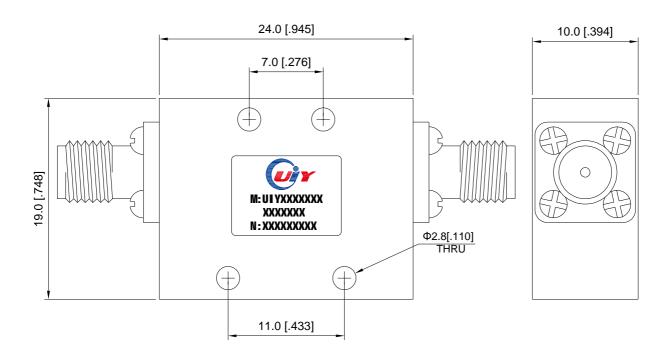

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China. Web: www.uiy.com
Tel: +86-755-83748888 +86-755-25999990 Fax: +86-755-25999999 E-mail: sales@uiy.com