

## DC-2200MHz – Low Pass Filter

### Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

### RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYLPF9426A2200NF	DC-2200	0.55	1.5	40dB @4400~6000MHz	100	N-F	-40 ~ +85
UIYLPF9426A2200SF	DC-2200	0.55	1.5	40dB @4400~6000MHz	100	SMA-F	-40 ~ +85

- <sup>2</sup> Listed are specific frequency ranges and other ranges are available.  
<sup>2</sup> Please provide the below information when inquiring and mark \* is required.
- \* 1. The specific pass band frequency range
  - \* 2. The specific rejection and frequency
  - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

### Mechanical Drawing

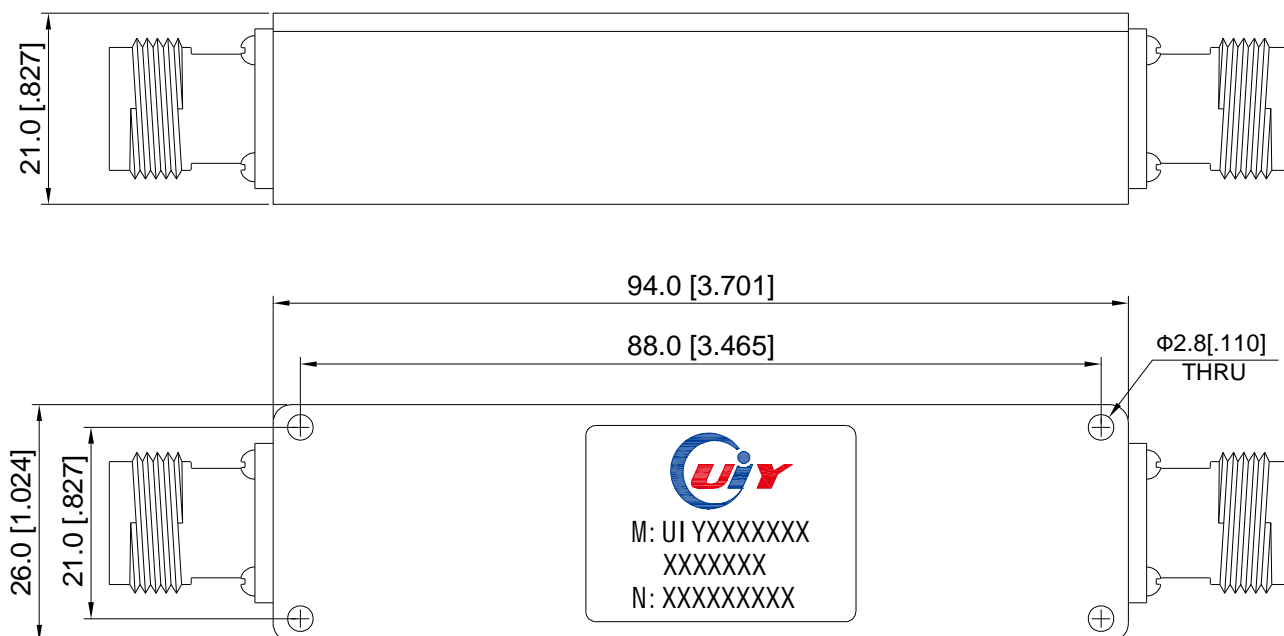

Unit: mm/ inch, General part tolerance is  $\pm 2\%$  unless otherwise stated.

Ver. 5