

5 to 7.5GHz – Microstrip Circulator

Design Features

- ◆ Can be in Dual Junction or Multi-Junction for higher isolation.
- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYMC1010A5T56	5.0 ~ 5.6	0.4	20	1.2	15	15	Microstrip	-55 ~ +85
UIYMC1010A5T6	5.0 ~ 6.0	0.5	18	1.3	15	15	Microstrip	-55 ~ +85
UIYMC1010A52T58	5.2 ~ 5.8	0.4	20	1.2	15	15	Microstrip	-55 ~ +85
UIYMC1010A57T6	5.7 ~ 6.0	0.4	20	1.2	15	15	Microstrip	-55 ~ +85
UIYMC1010A58T67	5.8 ~ 6.7	0.5	18	1.3	15	15	Microstrip	-55 ~ +85
UIYMC1010A6T65	6.0 ~ 6.5	0.5	20	1.25	15	15	Microstrip	-55 ~ +85
UIYMC1010A64T7	6.4 ~ 7.0	0.5	20	1.25	15	15	Microstrip	-55 ~ +85
UIYMC1010A65T75	6.5 ~ 7.5	0.5	20	1.3	15	15	Microstrip	-55 ~ +85

² Listed are specific frequency ranges and tailor-made ranges are available.


² Please provide the information below when inquiring and mark * is required.

* 1. The specific frequency ranges

* 2. Power handling (Forward, Reverse, Peak, etc.)

3. Other special requests (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

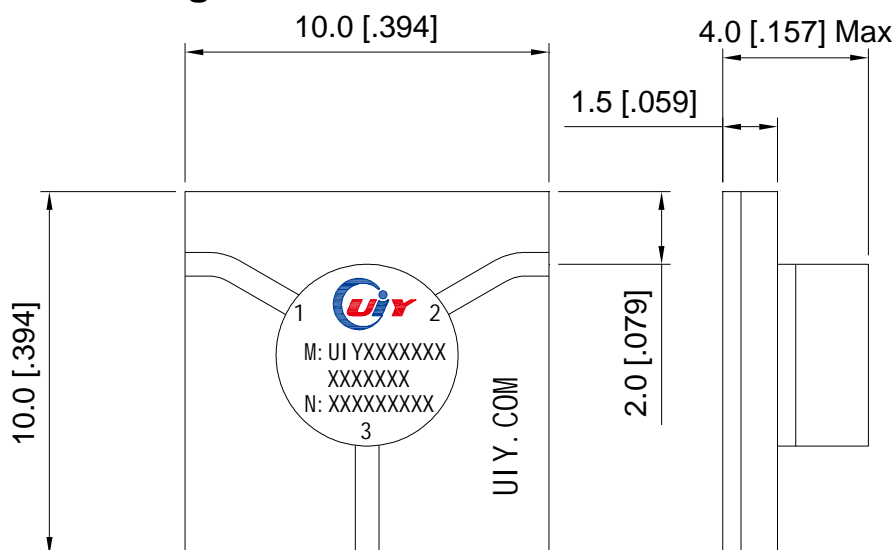

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5