

5.7 to 7.0GHz – Microstrip Isolator

Design Features


- ◆ Can be Dual Junction or Multiple for high isolation.
- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYMI1017A57T6	5.7 ~ 6.0	0.5	20	1.25	10	5	Microstrip	-55 ~ +85
UIYMI1017A6T65	6.0 ~ 6.5	0.5	20	1.25	10	5	Microstrip	-55 ~ +85
UIYMI1017A64T7	6.4 ~ 7.0	0.5	20	1.25	10	5	Microstrip	-55 ~ +85

- ² Listed are specific frequency ranges and tailor-made ranges are available.
² Please provide the information below when inquiring and mark * is required.
- * 1. The specific frequency ranges
 - * 2. Power handling (Forward, Reverse, Peak, etc.)
 - * 3. Other special requests (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

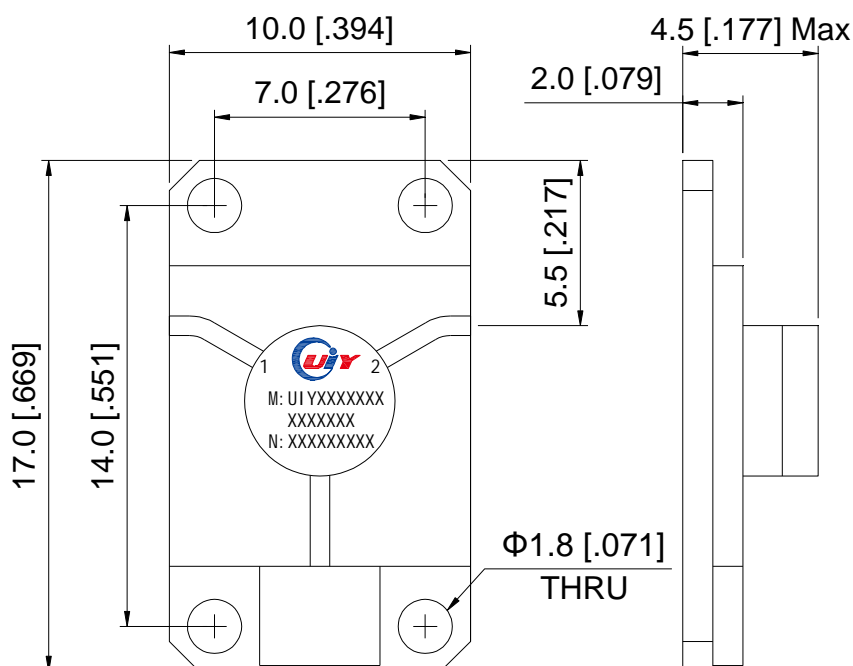

Unit: mm/ inch, General part tolerance is ± 0.2 mm unless otherwise stated.

Ver. 5