


20 to 1000MHz 5W – Power Amplifier

UIYPA15080C20T1000SF

RF Characteristics @T=25°C, VDD=+12VDC; 50Ω System					
Parameter	Symbol	Min	Type	Max	Unit
Operating Frequency	BW	20		1000	MHz
Power Output CW	Po		5		W
Saturation Output Power		10			
Power Gain @CW	G		40		dB
Input Power	Pin		0	5	dBm
Gain Flatness	△G		±2.0		dB
Input VSWR	S11		1.5:1		
Odd Harmonics @CW	H		-12		dBc
Even Harmonics @CW	H		-15		dBc
Noise Figure	NF		6	8	dB
Spurious Signals	Spur		-60		dBc
Operating Voltage	VDC		12	14	Volt
Current Consumption @Po=5W	Id		3	4	A
Operating Temperature	Tc	-40		+60	°C
Storage Temperature	Tstg	-55		+70	°C
Connector Type	Input SMA Female, Output SMA Female				
2 Listed are specific frequency ranges and other ranges are available.					
2 Please provide the below information when inquiring and mark * is required.					
* 1. The specific pass band frequency range					
* 2. The specific Gain and Power					
3. Other special requests.					

Mechanical Drawing

Note: External heatsink is needed in this module

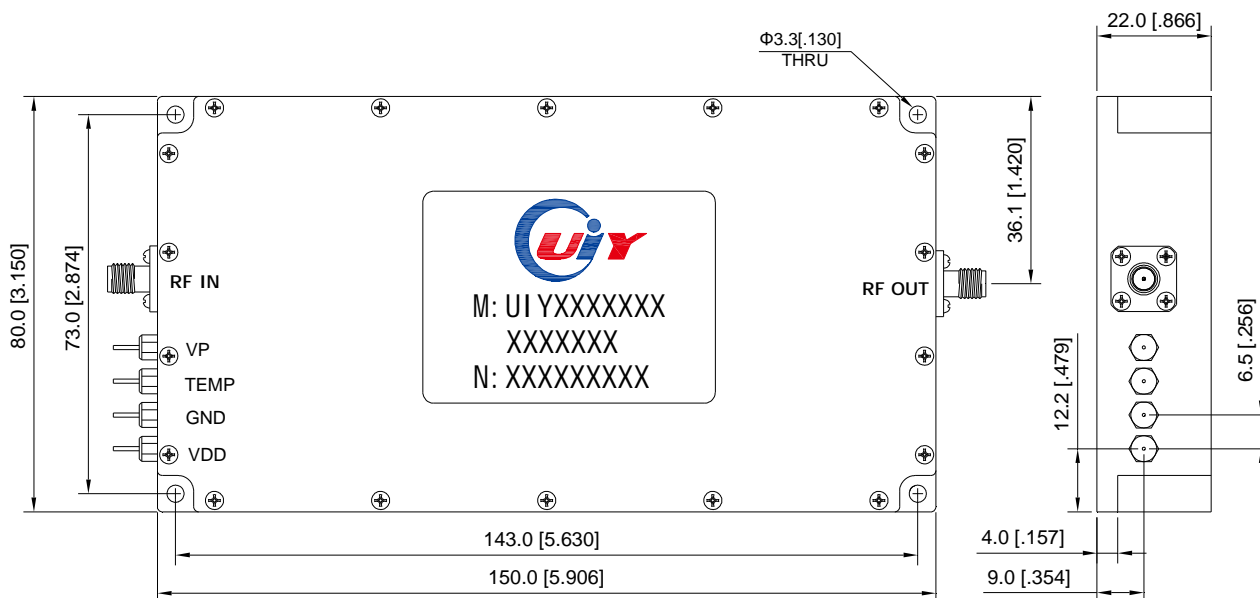

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5

3/F, Building A5, Shenbao Power Industrial Park, Shenzhen 518116, China.

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

Web: www.uiy.com

E-mail: sales@uiy.com