

87 to 416MHz – Triplexer

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range (MHz)		Insertion Loss Max(dB)	Ripple Max(dB)	Isolation Min(dB)	VSWR Max	Power (W)	Connector Type	Temp.(°C)
UIYTX100120A87T416NF	CH1	87 ~ 108	1.5	1.0	60	1.3	50	N-F	-20 ~ +65
	CH2	351 ~ 366							
	CH3	402 ~ 416							
UIYTX100120A87T416SF	CH1	87 ~ 108	1.5	1.0	60	1.3	50	SMA-F	-20 ~ +65
	CH2	351 ~ 366							
	CH3	402 ~ 416							

- ² Listed are specific frequency ranges and tailor-made ranges are available.
² Please provide the information below when inquiring and mark * is required.
 * 1. The specific frequency range TX and RX
 * 2. Insertion Loss, Isolation, VSWR
 * 3. Other special requests (Power handling, Temperature, Dimension, etc.)

Mechanical Drawing

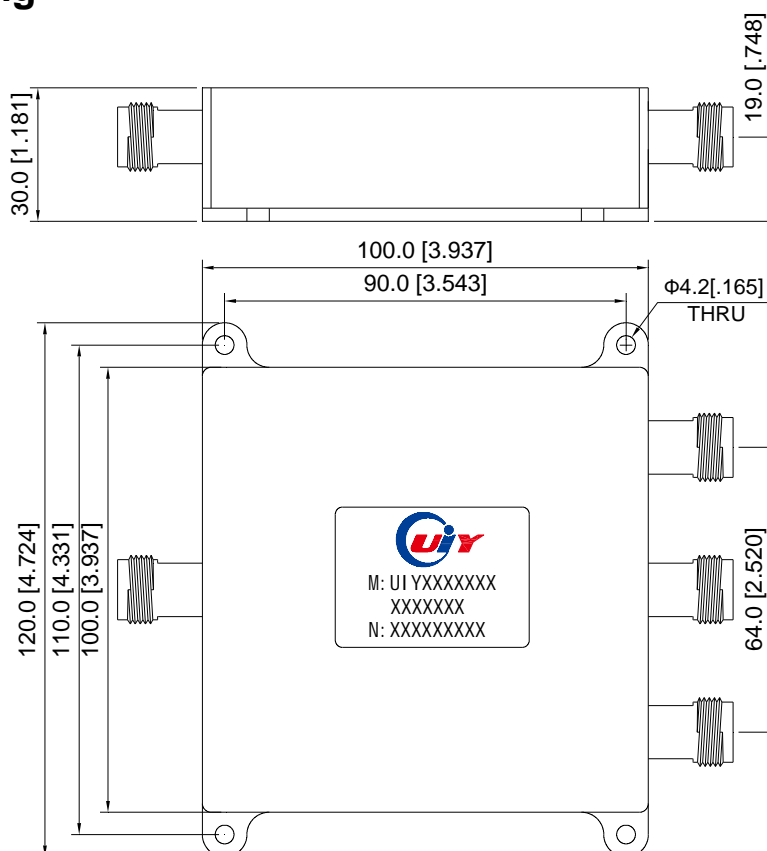

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5