

## 5.4 to 8.0GHz – Waveguide Circulator

### Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

### RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYWC6880A54T59	5.4 ~ 5.9	0.3	23	1.15	100	100	WR137(BJ70)	-40 ~ +85
UIYWC6880A58T71	5.8 ~ 7.1	0.4	18	1.3	100	100	WR137(BJ70)	-40 ~ +85
UIYWC6880A6T65	6.0 ~ 6.5	0.3	23	1.15	100	100	WR137(BJ70)	-40 ~ +85
UIYWC6880A6T77	6.0 ~ 7.7	0.4	18	1.3	100	100	WR137(BJ70)	-40 ~ +85
UIYWC6880A7T8	7.0 ~ 8.0	0.35	20	1.2	100	100	WR137(BJ70)	-40 ~ +85
UIYWC6880A78T8	7.8 ~ 8.0	0.25	25	1.12	100	100	WR137(BJ70)	-40 ~ +85

- 2 Listed are specific frequency ranges and other ranges are available.
- 2 Please provide the below information when inquiring and mark \* is required.
- \* 1. The specific frequency range
  - \* 2. Power handling (Forward, Reverse, Peak, etc.)
  - 3. Other special requests (Such as Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

### Mechanical Drawing

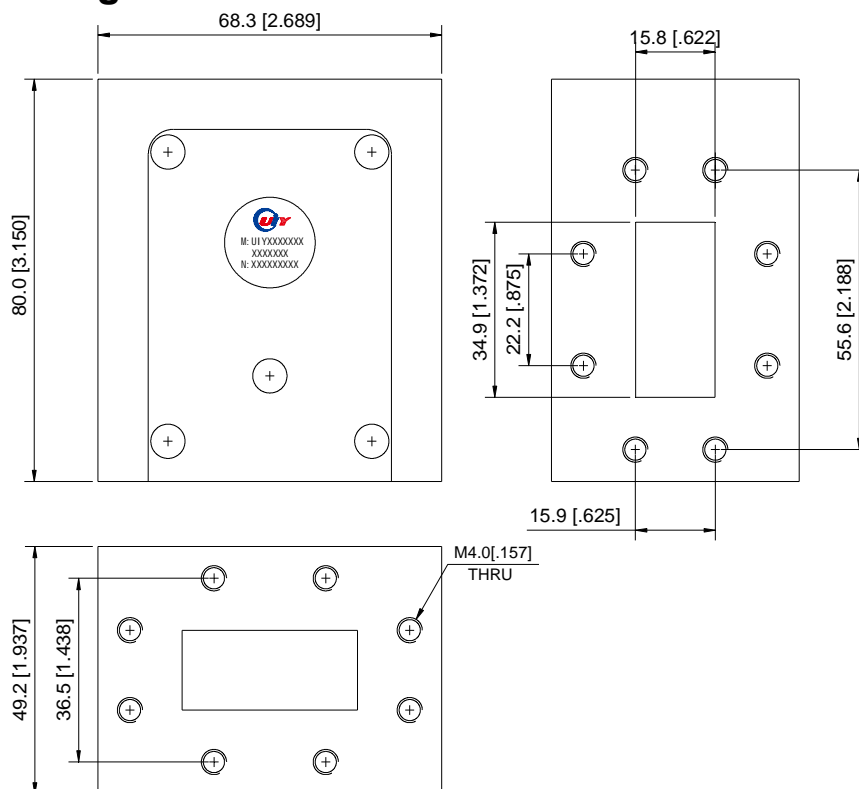

Unit: mm/ inch, General part tolerance is  $\pm 0.2$ mm unless otherwise stated.