

8200 to 9300MHz – Band Pass Filter

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics


Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF8418A8200T9300SF	8200 ~ 9300	1.5	1.5	30dB @8000MHz 30dB @9500MHz	10	SMA-F	-40 ~ +85

² Listed are specific frequency ranges and tailor-made ranges are available.

² Please provide the below information when inquiring and mark * is required.

- * 1. The specific pass band frequency range
- * 2. The specific rejection and frequency
- 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

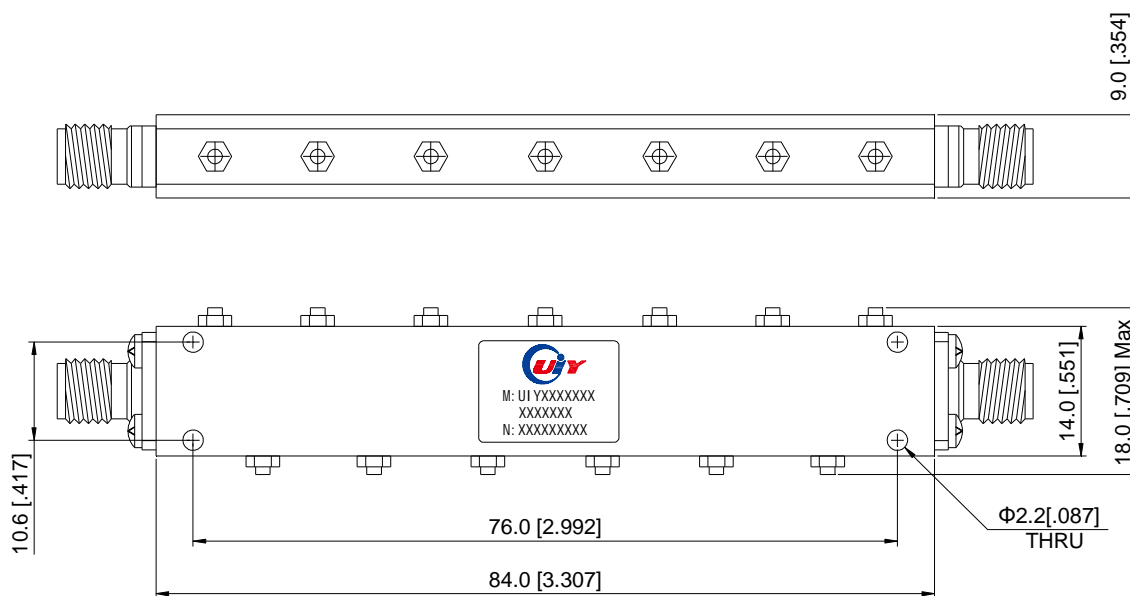

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Web: www.uiy.com

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

E-mail: sales@uiy.com