

12 to 18GHz – 4 Port Dual Junction Coaxial Circulator

Design Features

- ◆ Can be dual junction even three for high isolation.
- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)		Isolation Min(dB)		VSWR Max	Forward Power (W)	Reverse Power (W)	Connector Type	Temp.(°C)
		1-2 3-4	2-3 4-1	2-1 4-3	1-4 3-2					
UIYBCC2618B4P12T18SF	12.0 ~ 18.0	1.0	0.5	36	18	1.3	60	60	SMA-F	-55 ~ +85
UIYBCC2618B12T184PSMTSF	12.0 ~ 18.0	1.0	0.5	36	18	1.3	60	60	SMA-M @P1 SMA-F @P2, P3&P4	-55 ~ +85
UIYBCC2618B12T184PSFTSM	12.0 ~ 18.0	1.0	0.5	36	18	1.3	60	60	SMA-M @P2 SMA-F @P1, P3&P4	-55 ~ +85

² List are specify frequency range and other ranges available.

² Please enter below information when inquiry and mark * is must.


* 1. The specific frequency range

* 2. Power handling (Forward, Reverse, Peak, etc.)

* 3. Connect type (SMA Male/ Female, N Male/ Female, etc.)

4. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

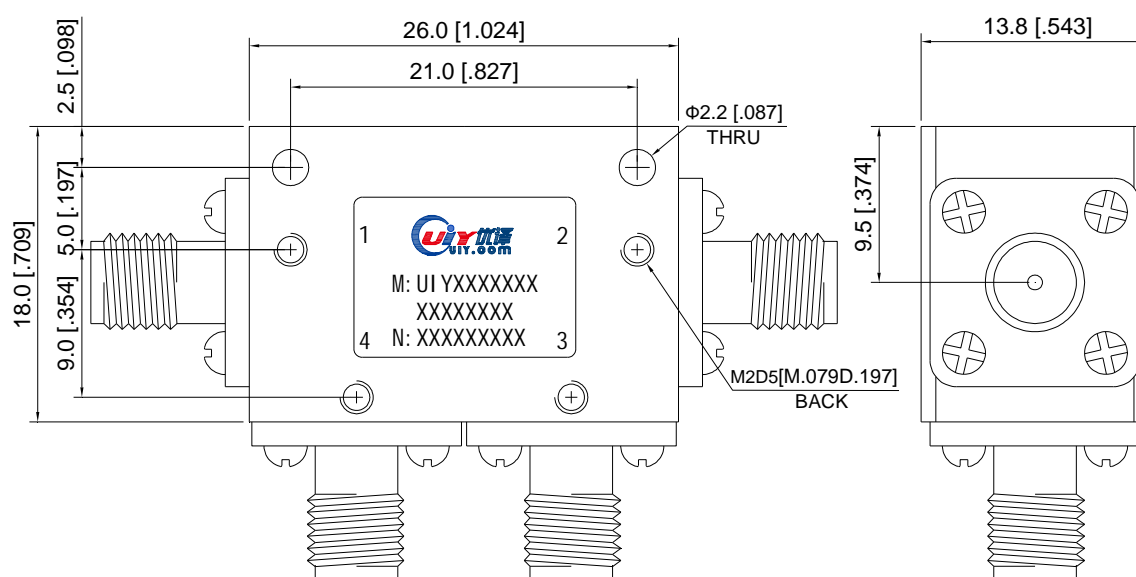

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5

3/F, Building A5, Shenbao Power Industrial Park, Shenzhen 518116, China.

Web: www.uiy.com

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

E-mail: sales@uiy.com