

870 to 880MHz – Band Pass Filter

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics


Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	Ripple	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF17384A870T880NF	870 ~ 880	2.0	1.0	1.3	80dB @885-960MHz	100	N-F	-20 ~ +60
UIYBPF17384A870T880SF	870 ~ 880	2.0	1.0	1.3	80dB @885-960MHz	100	SMA-F	-20 ~ +60

² Listed are specific frequency ranges and other ranges are available.

² Please provide the below information when inquiring and mark * is required.

- * 1. The specific pass band frequency range
- * 2. The specific rejection and frequency
- 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

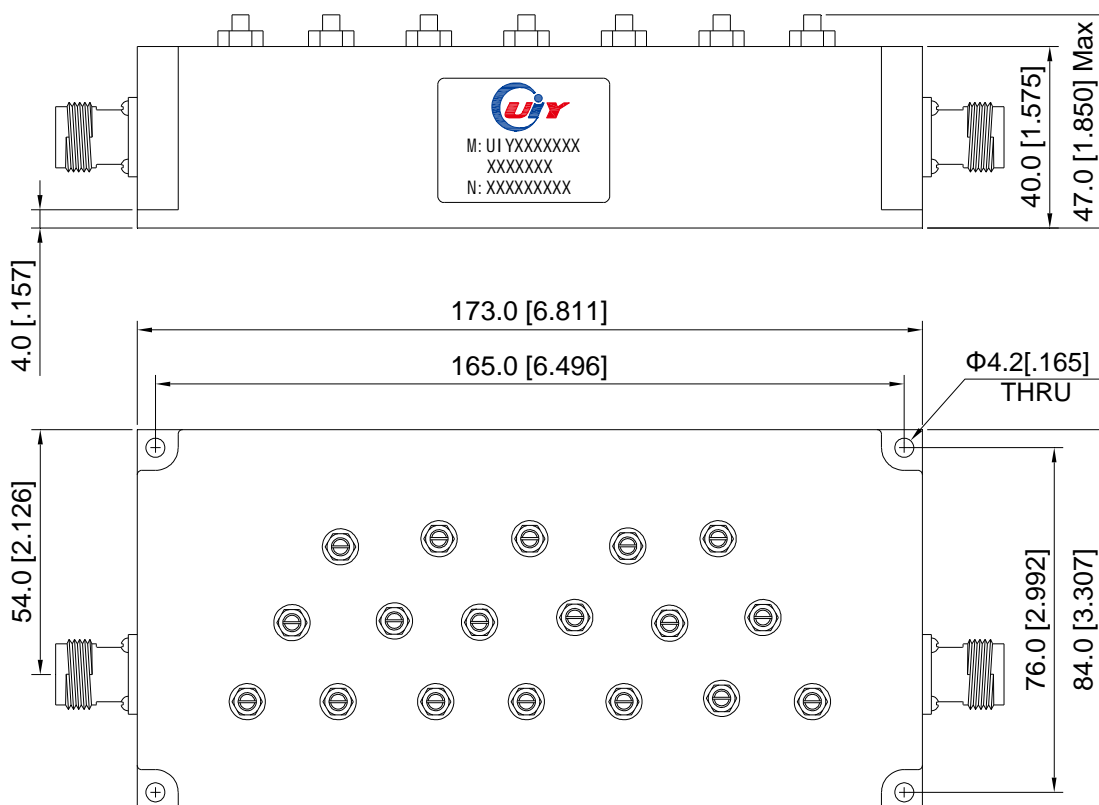

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5

3/F, Building A5, Shenbao Power Industrial Park, Shenzhen 518116, China.

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

Web: www.uiy.com

E-mail: sales@uiy.com