

940 to 960MHz – Band Pass Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF5539A940T960NF	940 ~ 960	1.5	1.3	30dB @1850~2100MHz	10	N-F	-40 ~ +85
UIYBPF5539A940T960SF	940 ~ 960	1.5	1.3	30dB @1850~2100MHz	10	SMA-F	-40 ~ +85

- 2 Listed are specific frequency ranges and other ranges are available.
- 2 Please provide the below informations when inquiring and mark * is required.
- * 1. The specific pass band frequency range
 - * 2. The specific rejection and frequency
 - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

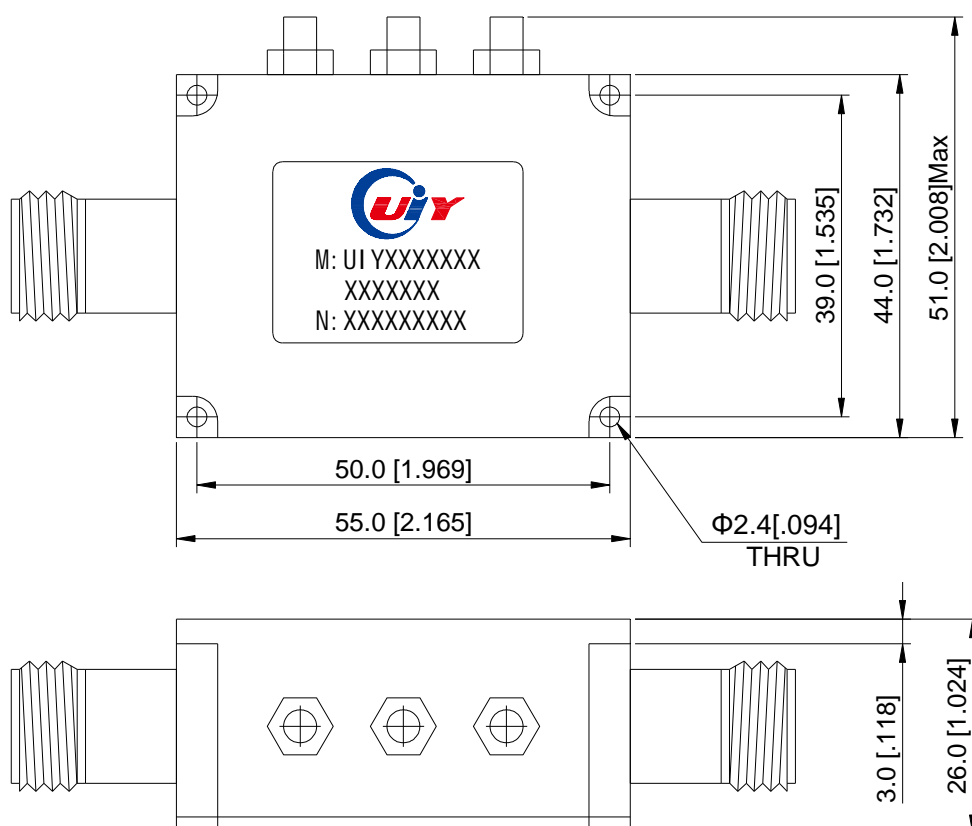

Unit: mm/ inch, General part tolerance is ± 0.2 mm unless otherwise stated.

Ver. 5