

1700 to 2600MHz – Band Pass Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF6038A1700T2600SFTSM	1700 ~ 2600	1.0	1.5	40dB @1300MHz 40dB @3000MHz 60dB @1000MHz 60dB @4000MHz	50	SMA-F to SMA-M	-40 ~ +85
UIYBPF6038A1700T2600SF	1700 ~ 2600	1.0	1.5	40dB @1300MHz 40dB @3000MHz 60dB @1000MHz 60dB @4000MHz	50	SMA-F	-40 ~ +85

- ² Listed are specific frequency ranges and other ranges are available.
- ² Please provide the below information when inquiring and mark * is required.
- * 1. The specific pass band frequency range
 - * 2. The specific rejection and frequency
 - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

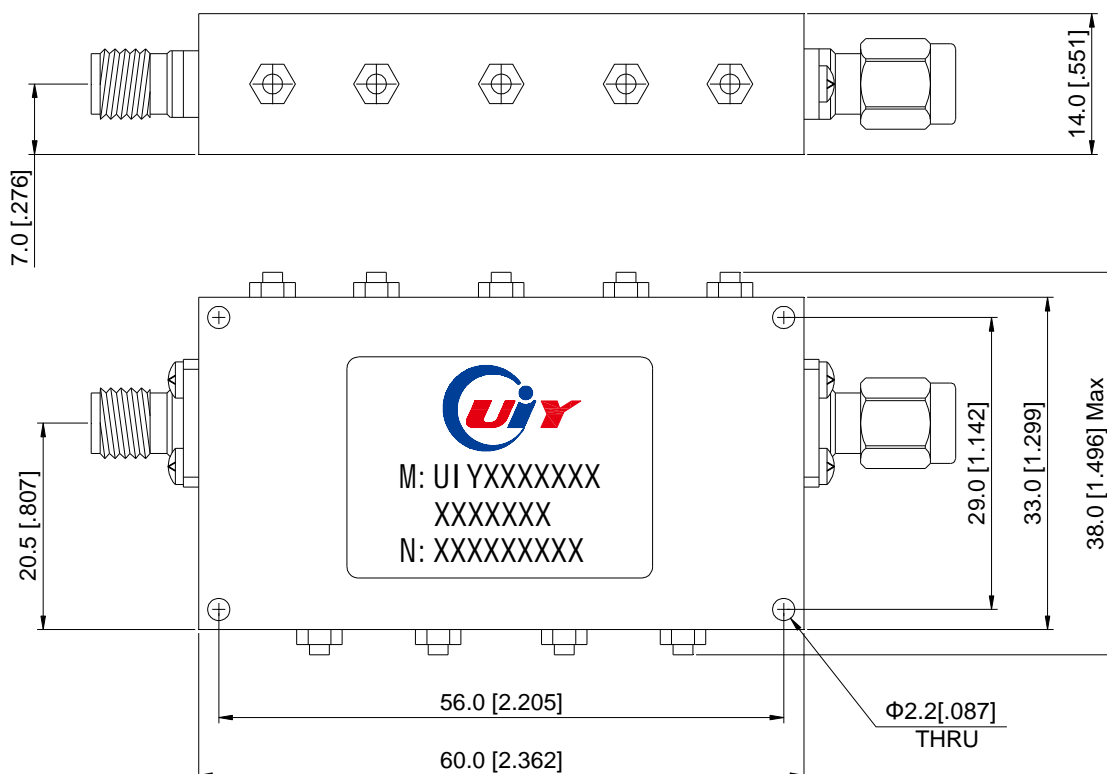

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5