

1350 to 1785MHz – Band Pass Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF7855A1350T1518SF	1350 ~ 1518	3.0	1.5	40dB @1625 ~ 1785MHz	50	SMA-F	-55 ~ +85
UIYBPF7855A1625T1785SF	1625 ~ 1785	3.0	1.5	40dB @1350 ~ 1518MHz	50	SMA-F	-55 ~ +85

- 2 Listed are specific frequency ranges and tailor-made ranges are available.
 2 Please provide the below information when inquiring and mark * is required.
 * 1. The specific pass band frequency range.
 * 2. The specific rejection and frequency.
 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

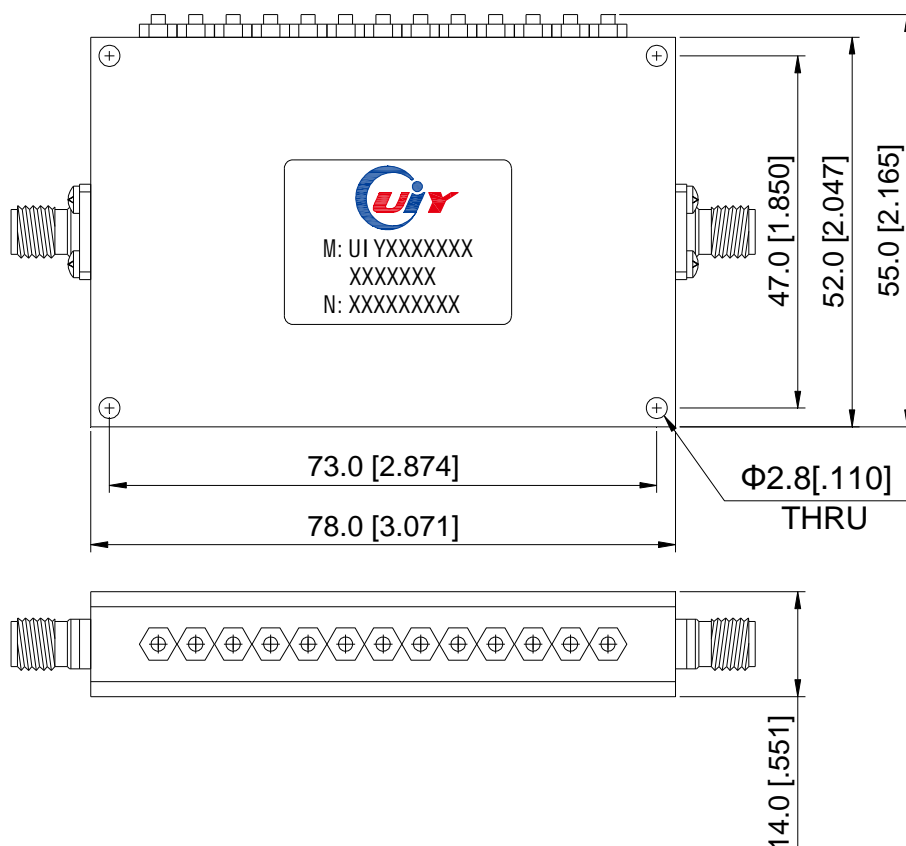

Unit: mm/ inch, General part tolerance is ±0.2mm unless otherwise stated.

Ver. 5