

15250 to 15750MHz – Band Pass Filter

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYBPF9033A15250T15750WR62	15250 ~ 15750	0.8	1.3	30dB @14500MHz 30dB @16500MHz	10	WR62	-40 ~ +85

² Listed are specific frequency ranges and tailor-made ranges are available.


² Please provide the below information when inquiring and mark * is required.

* 1. The specific pass band frequency range

* 2. The specific rejection and frequency

3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

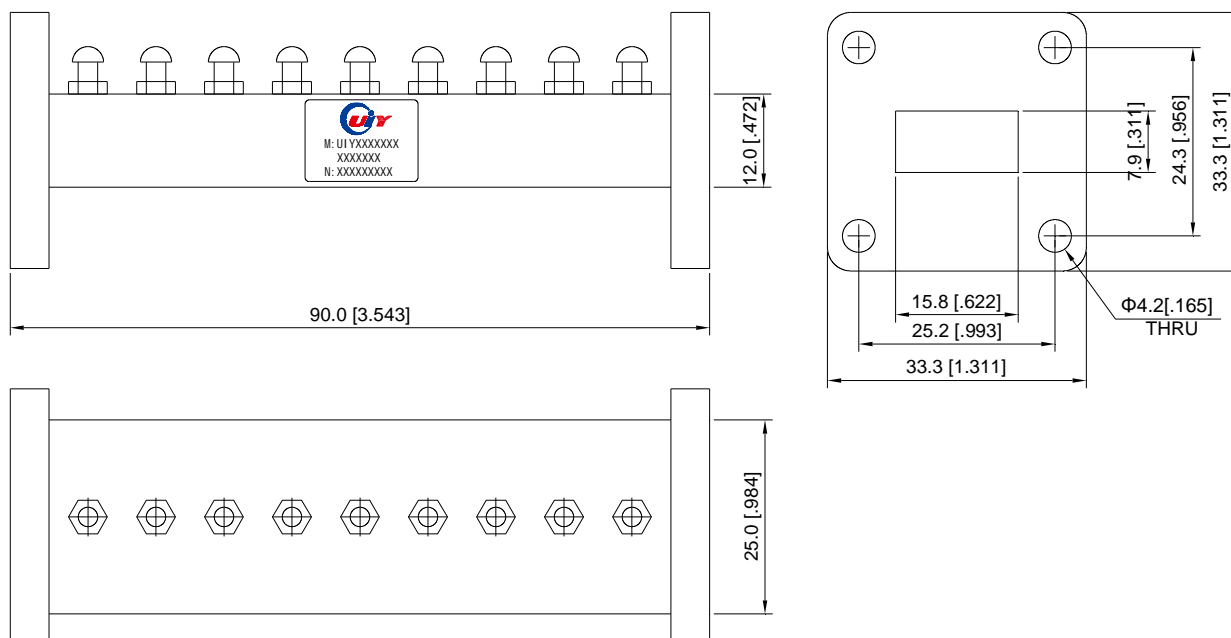

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.1

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Web: www.uiy.com

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

E-mail: sales@uiy.com