

2000W DC-4.2GHz – Coaxial Attenuator

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.
- ◆ Military, space and commercial applications.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Freq. Range	Power	Attenuation Value	Attenuation Tolerance	VSWR Max	Connector Type	Impedance
UIYCA2000CD42A40	DC-4.2GHz	2000W	40 dB	±2.0 dB	1.4	7/16-M to 7/16-F	50 Ω
UIYCA2000CDTNF42A40	DC-4.2GHz	2000W	40 dB	±2.0 dB	1.4	7/16-M to N-F	50 Ω
UIYCA2000CDFTNF42A40	DC-4.2GHz	2000W	40 dB	±2.0 dB	1.4	7/16-F to N-F	50 Ω

- 2 List are specify frequency range and other ranges available.
 2 Please enter below information when inquiry and mark * is must.
 * 1. Power handling, Attenuation Value
 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
 3. Other special request if have (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

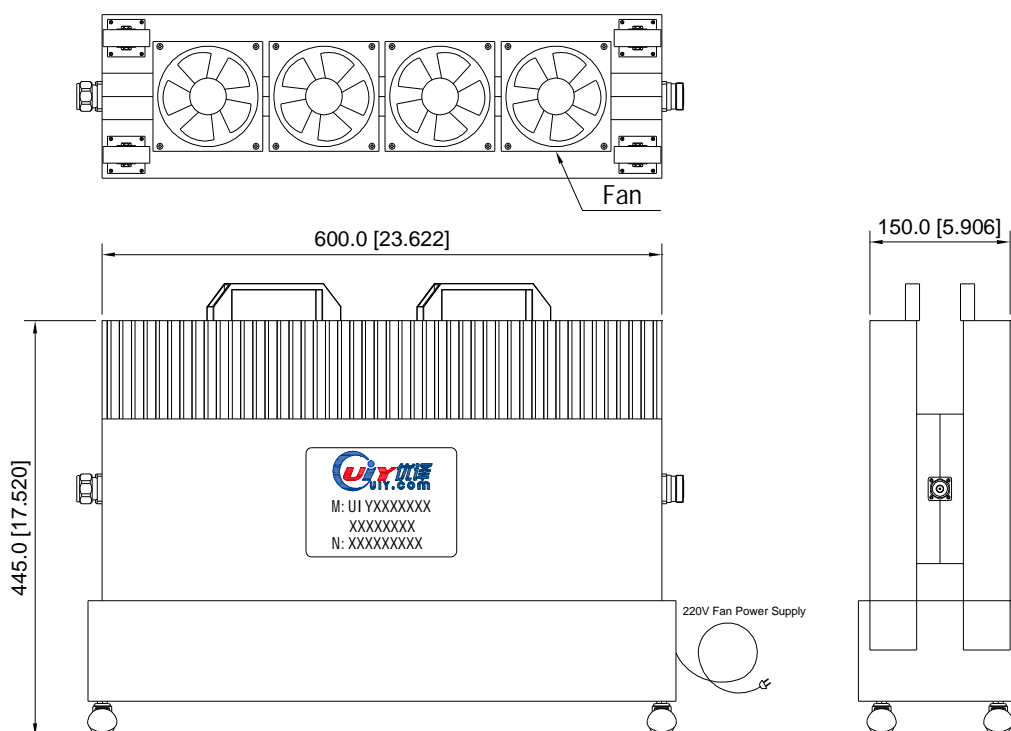

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5.0