

30W – SMA Coaxial Attenuator

Design Features


- ◆ High RF performance, ultra-competitive price. ◆ Military, space and commercial applications.
- ◆ Custom design available upon request. ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range	Power	Attenuation Value	Attenuation Tolerance	VSWR Max	Connector Type	Impedance
UIYCA30AS3A1	DC-3GHz	30W	1 dB	±0.5 dB	1.2	SMA-M / SMA-F	50 Ω
UIYCA30AS3A2		30W	2 dB	±0.5 dB	1.2	SMA-M / SMA-F	50 Ω
UIYCA30AS3A3		30W	3 dB	±0.5 dB	1.2	SMA-M / SMA-F	50 Ω
UIYCA30AS3A5		30W	5 dB	±0.5 dB	1.2	SMA-M / SMA-F	50 Ω
UIYCA30AS3A6		30W	6 dB	±0.5 dB	1.2	SMA-M / SMA-F	50 Ω
UIYCA30AS3A10		30W	10 dB	±0.6 dB	1.2	SMA-M / SMA-F	50 Ω
UIYCA30AS3A20		30W	20 dB	±0.8 dB	1.2	SMA-M / SMA-F	50 Ω
UIYCA30AS3A30		30W	30 dB	±0.8 dB	1.2	SMA-M / SMA-F	50 Ω
UIYCA30AS3A40		30W	40 dB	±1.0 dB	1.2	SMA-M / SMA-F	50 Ω
UIYCA30AS5A1		DC-5GHz	30W	1 dB	±0.6 dB	1.3	SMA-M / SMA-F
UIYCA30AS5A2	30W		2 dB	±0.6 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA30AS5A3	30W		3 dB	±0.6 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA30AS5A5	30W		5 dB	±0.8 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA30AS5A6	30W		6 dB	±0.8 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA30AS5A10	30W		10 dB	±1.0 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA30AS5A20	30W		20 dB	±1.5 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA30AS5A30	30W		30 dB	±1.5 dB	1.3	SMA-M / SMA-F	50 Ω
UIYCA30AS5A40	30W		40 dB	±1.5 dB	1.3	SMA-M / SMA-F	50 Ω

- ² Listed are specific frequency ranges and tailor-made ranges are available.
² Please provide the information below when inquiring and mark * is required.
 * 1. Power handling, Attenuation Value
 2. Connect type (SMA Male/ Female, N Male/ Female, etc.)
 3. Other special requests (VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

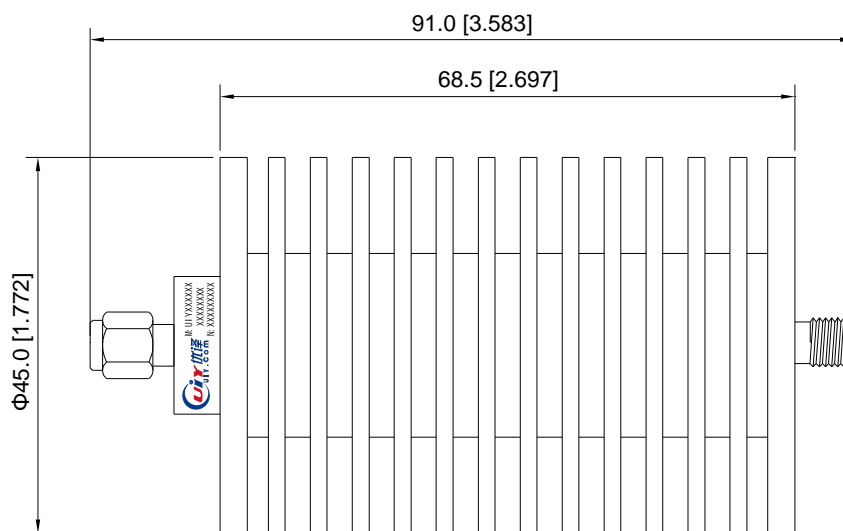

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5.1