

140 to 300MHz – 4 Port Dual Junction Coaxial Circulator

Design Features


- ◆ Can be dual junction even three for high isolation.
- ◆ Military, space and commercial applications.
- ◆ Guaranteed for one year standard.
- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.

RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss (1-2 & 3-4) Max(dB)	Isolation (2-1 & 4-3) Min(dB)	VSWR Max	Forward Power (W)	Reverse Power (W)	Connector Type	Temp.(°C)
UIYCDC11256A4P140T142SF	140 ~ 142	1.6	36	1.3	100	100	SMA-F	-10 ~ +60
UIYCDC11256A4P147T150NF	147 ~ 150	1.6	36	1.3	300	300	N-F	-10 ~ +60
UIYCDC11256A4P150T155SF	150 ~ 155	1.0	40	1.25	100	100	SMA-F	-10 ~ +70
UIYCDC11256A4P150T170SF	150 ~ 170	1.4	36	1.3	100	100	SMA-F	-10 ~ +70
UIYCDC11256A4P168T171NF	168 ~ 171	0.8	45	1.2	300	300	N-F	-30 ~ +70
UIYCDC11256A4P170T200SF	170 ~ 200	1.4	36	1.3	100	100	SMA-F	-30 ~ +70
UIYCDC11256A4P180T220SF	180 ~ 220	1.2	36	1.3	100	100	SMA-F	-30 ~ +70
UIYCDC11256A4P192T232NF	192 ~ 232	0.8	40	1.25	300	300	N-F	-30 ~ +70
UIYCDC11256A4P197.5T207.5SMTSF	197.5~207.5	0.8	45	1.2	100	100	SMA-M to SMA-F	-30 ~ +70
UIYCDC11256A4P200T250SF	200 ~ 250	1.2	40	1.25	100	100	SMA-F	-30 ~ +70
UIYCDC11256A4P230T250NF	230 ~ 250	0.8	45	1.2	300	300	N-F	-30 ~ +70
UIYCDC11256A4P250T300SF	250 ~ 300	0.8	40	1.25	100	100	SMA-F	-30 ~ +70

- ² List are specify frequency range and other ranges available.
² Please enter below information when inquiry and mark * is must.
 * 1. The specific frequency range
 * 2. Power handling (Forward, Reverse, Peak, etc.)
 3. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

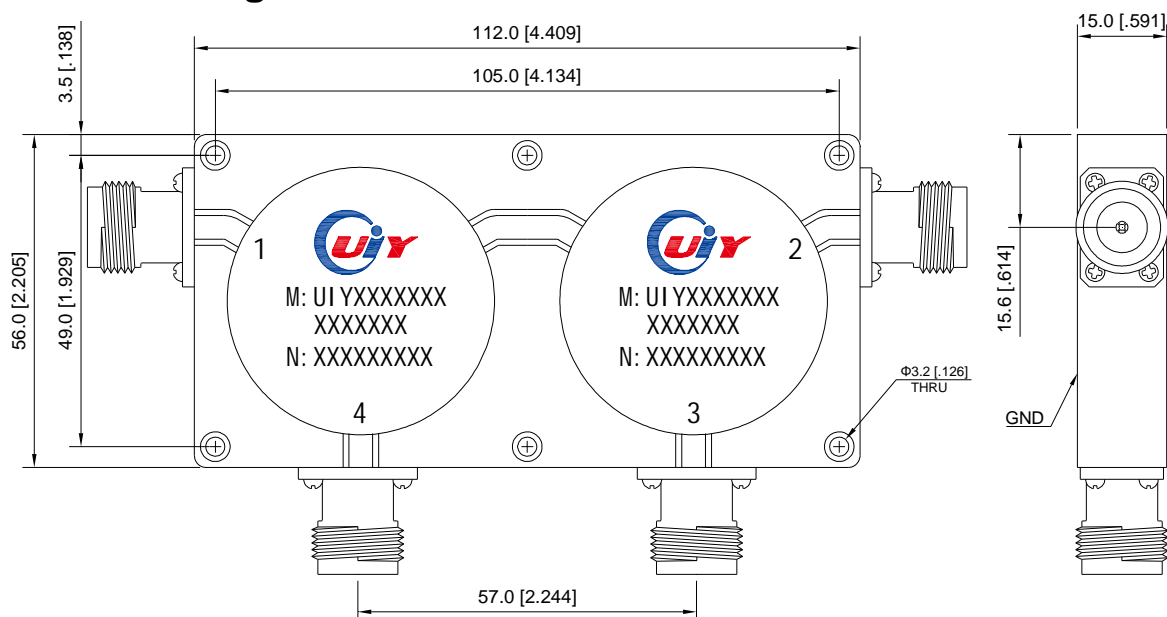

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5