

8 to 12GHz – Dual Junction Microstrip Circulator

Design Features

- ◆ Can be in Dual Junction or Multi-Junction for higher isolation.
- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)		Isolation Min(dB)				VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
		2-1	1-3	1-2	2-3	3-1	3-2					
UIYDMC108B8T12	8.0 ~ 12.0	0.65	1.1	14	16	28	16	1.35	10	5	Microstrip	-55 ~ +85
UIYDMC108B83T93	8.3 ~ 9.3	0.45	0.85	20	20	30	20	1.25	10	5	Microstrip	-55 ~ +85
UIYDMC108B9T96	9.0 ~ 9.6	0.45	0.85	20	20	30	20	1.25	10	5	Microstrip	-55 ~ +85
UIYDMC108B9T10	9.0 ~ 10.0	0.5	0.9	20	20	30	20	1.25	10	5	Microstrip	-55 ~ +85
UIYDMC108B10T11	10.0 ~ 11.0	0.5	0.9	20	20	30	20	1.25	10	5	Microstrip	-55 ~ +85

² Listed are specific frequency ranges and tailor-made ranges are available.


² Please provide the information below when inquiring and mark * is required.

* 1. The specific frequency ranges

* 2. Power handling (Forward, Reverse, Peak, etc.)

* 3. Other special requests (Insertion Loss, Isolation, VSWR, Temperature, Dimension etc.)

Mechanical Drawing

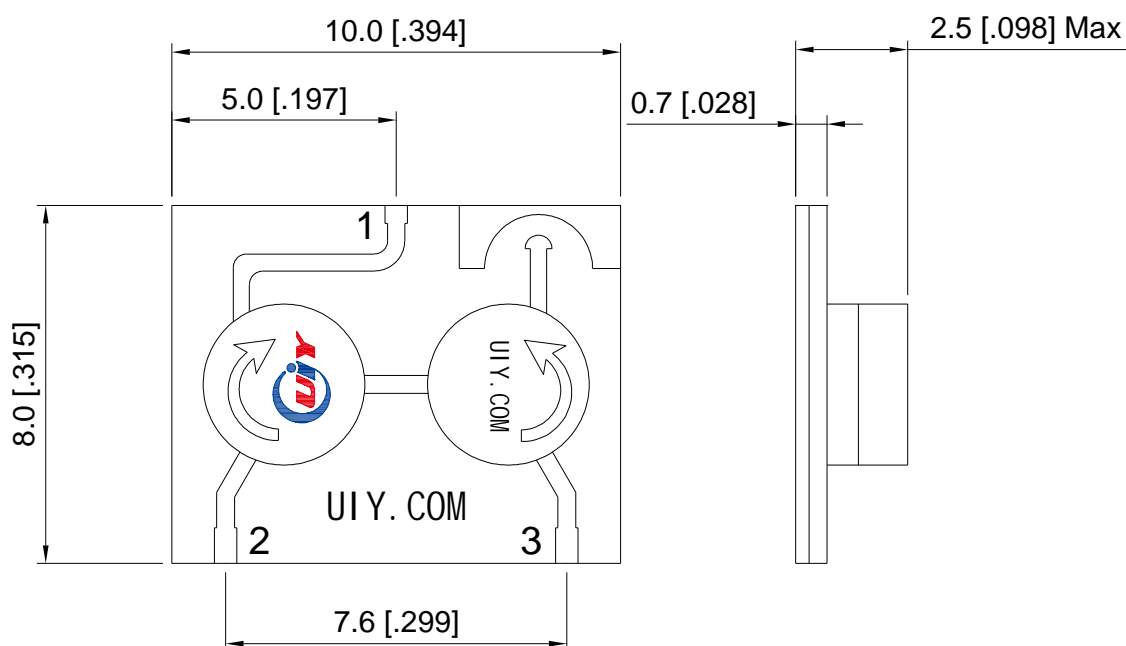

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.2