

136-175MHz - 3 way Combiner / Hybrid Coupler

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Freq.Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Connector Type	Power (W)	Temp.(°C)
UIYHC26280C136T175NF	136 ~ 175	0.9 (Coupling 4.8dB)	20	1.3	N-F	200	-40 ~ +85
UIYHC26280C136T175SF	136 ~ 175	0.9 (Coupling 4.8dB)	20	1.3	SMA-F	100	-40 ~ +85
UIYHC26280C136T175DF	136 ~ 175	0.9 (Coupling 4.8dB)	20	1.3	7/16-F	200	-40 ~ +85

✧ Listed are specific frequency ranges and other ranges are available.
 ✧ Please provide the below information when inquiring and mark * is required.
 * 1. The specific frequency range
 2. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

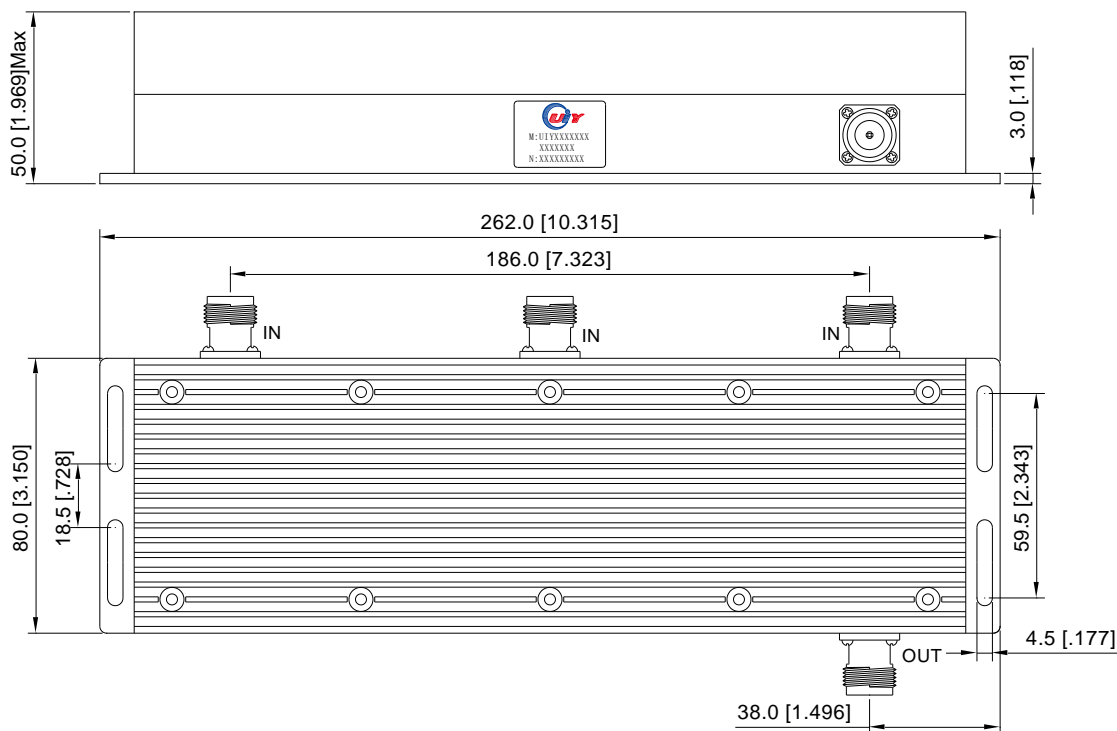

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5