

DC-1800MHz – Low Pass Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYLPF6420A1800NF	DC-1800	0.2dB @ 1610-1626.5MHz	1.5:1 @ 1610-1626.5MHz	20dB @ 3220-3253MHz 25dB @ 4830-4879.5MHz 30dB @ 6440-6506MHz	10	SMA-F to SMA-M	-40 ~ +85

- ² Listed are specific frequency ranges and other ranges are available.
- ² Please provide the below informations when inquiring and mark * is required.
- * 1. The specific pass band frequency range
 - * 2. The specific rejection and frequency
 - * 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

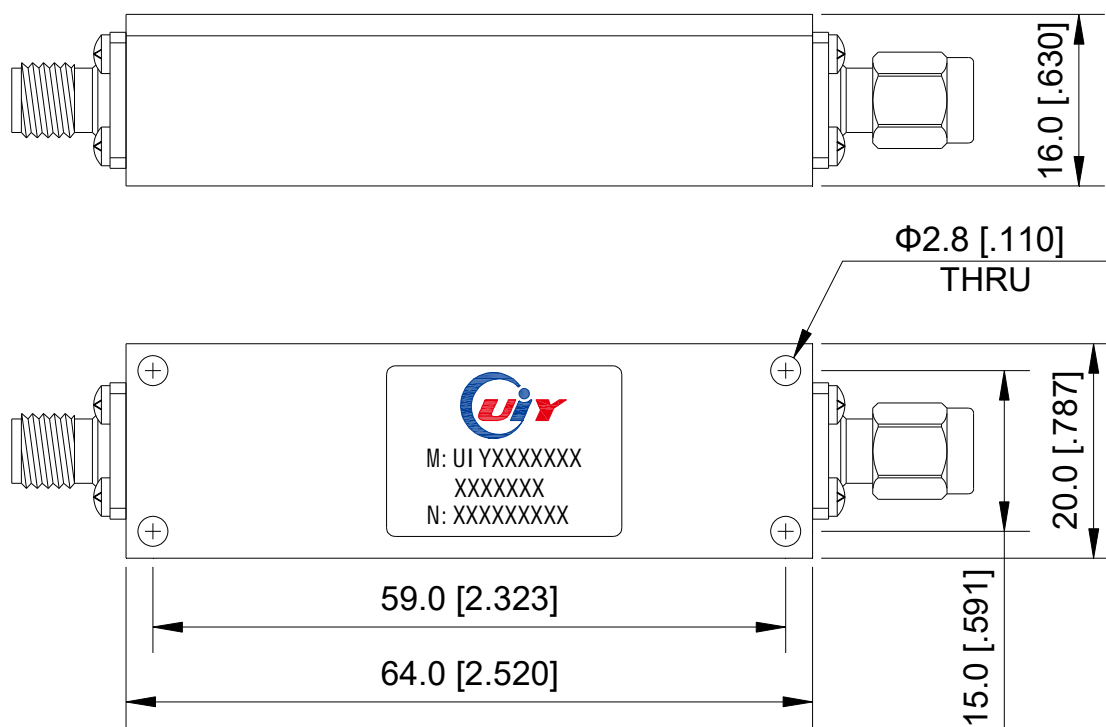

Unit: mm/ inch, General part tolerance is ± 0.2 mm unless otherwise stated.

Ver. 5