

DC-3600MHz – Low Pass Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYLPF9923A3600SF	DC-3600	1.0	1.8	45dB @4300-8000MHz	100	SMA-F	-30 ~ +70
UIYLPF9923A3600NF	DC-3600	1.0	1.8	45dB @4300-8000MHz	100	N-F	-30 ~ +70

- 2 Listed are specific frequency ranges and other ranges are available.
 2 Please provide the below information when inquiring and mark * is required.
 * 1. The specific pass band frequency range
 * 2. The specific rejection and frequency
 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

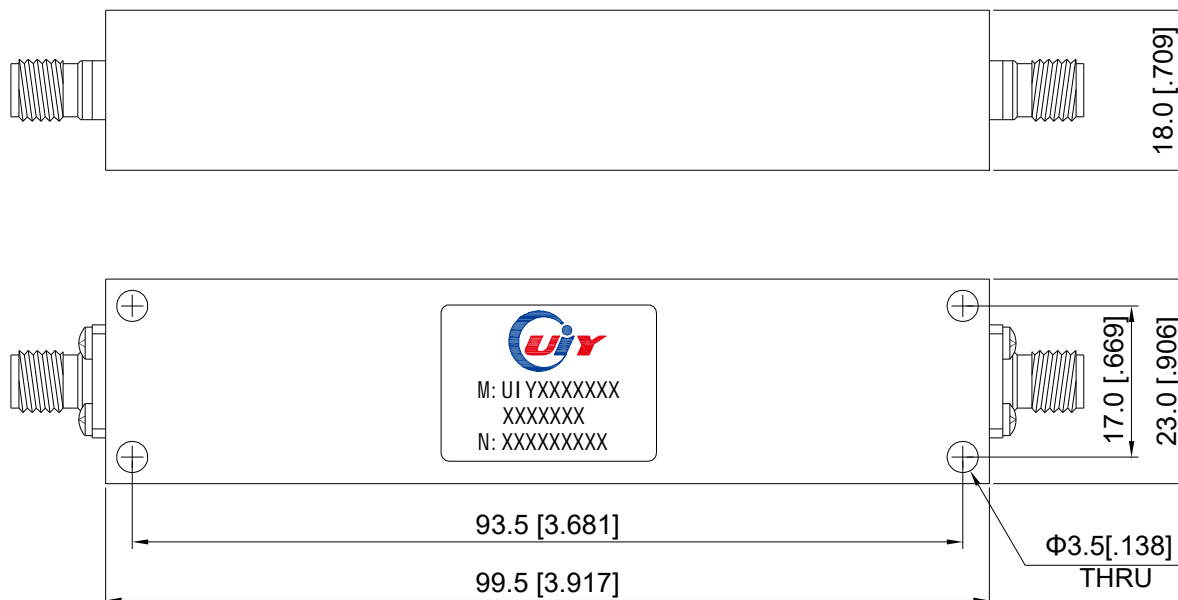

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5