

7 to 9.5GHz – Microstrip Circulator

Design Features

- ◆ Can be dual junction even three for high isolation.
- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYMC77A7T8	7.0 ~ 8.0	0.5	20	1.25	15	15	Microstrip	-55 ~ +85
UIYMC77A7T9	7.0 ~ 9.0	0.6	18	1.3	15	15	Microstrip	-55 ~ +85
UIYMC77A79T84	7.9 ~ 8.4	0.5	20	1.25	15	15	Microstrip	-55 ~ +85
UIYMC77A75T95	7.5 ~ 9.5	0.6	18	1.3	15	15	Microstrip	-55 ~ +85
UIYMC77A8T85	8.0 ~ 8.5	0.5	20	1.25	15	15	Microstrip	-55 ~ +85

² List are specify frequency range and other ranges available.


² Please enter below information when inquiry and mark * is must.

* 1. The specific frequency range

* 2. Power handling (Forward, Reverse, Peak, etc.)

* 3. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

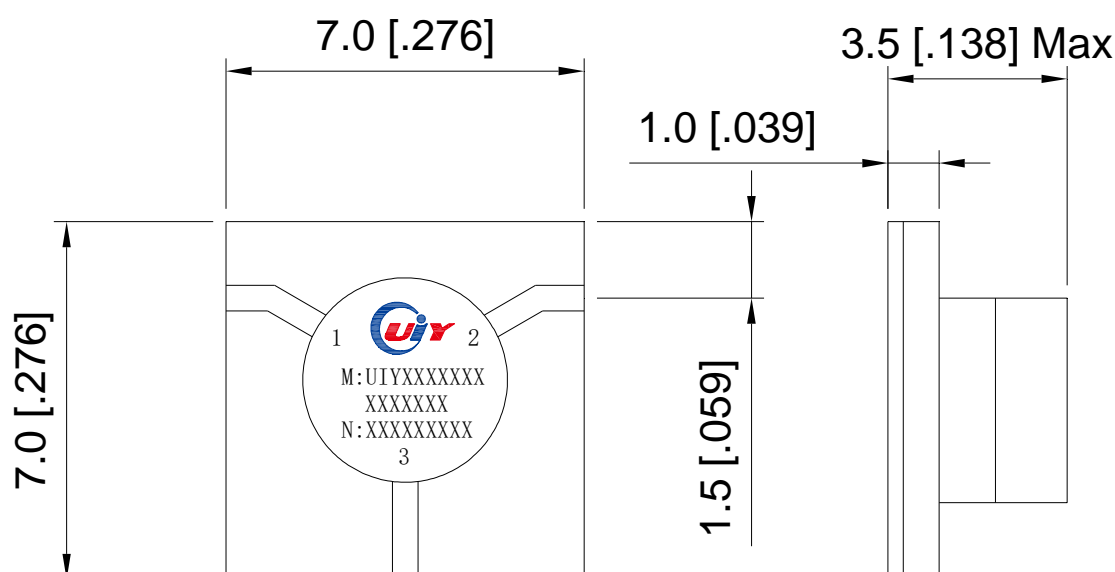

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5

3/F, Building A5, Shenbao Power Industrial Park, Shenzhen 518116, China.

Web: www.uiy.com

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

E-mail: sales@uiy.com