

93.5 to 94.5GHz – Waveguide Isolator

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYWI2030A935T945	93.5 ~ 94.5	0.6	20	1.2	10	2	WR10(BJ900)	-40 ~ +85

- ² Listed are specific frequency ranges and tailor-made ranges are available.
- ² Please provide the information below when inquiring and mark * is required.
- * 1. The specific frequency ranges
 - * 2. Power handling (Forward, Reverse, Peak, etc.)
 - 3. Other special requests (Such as Insertion Loss, Isolation, VSWR, Temperature, Dimension etc.)

Mechanical Drawing

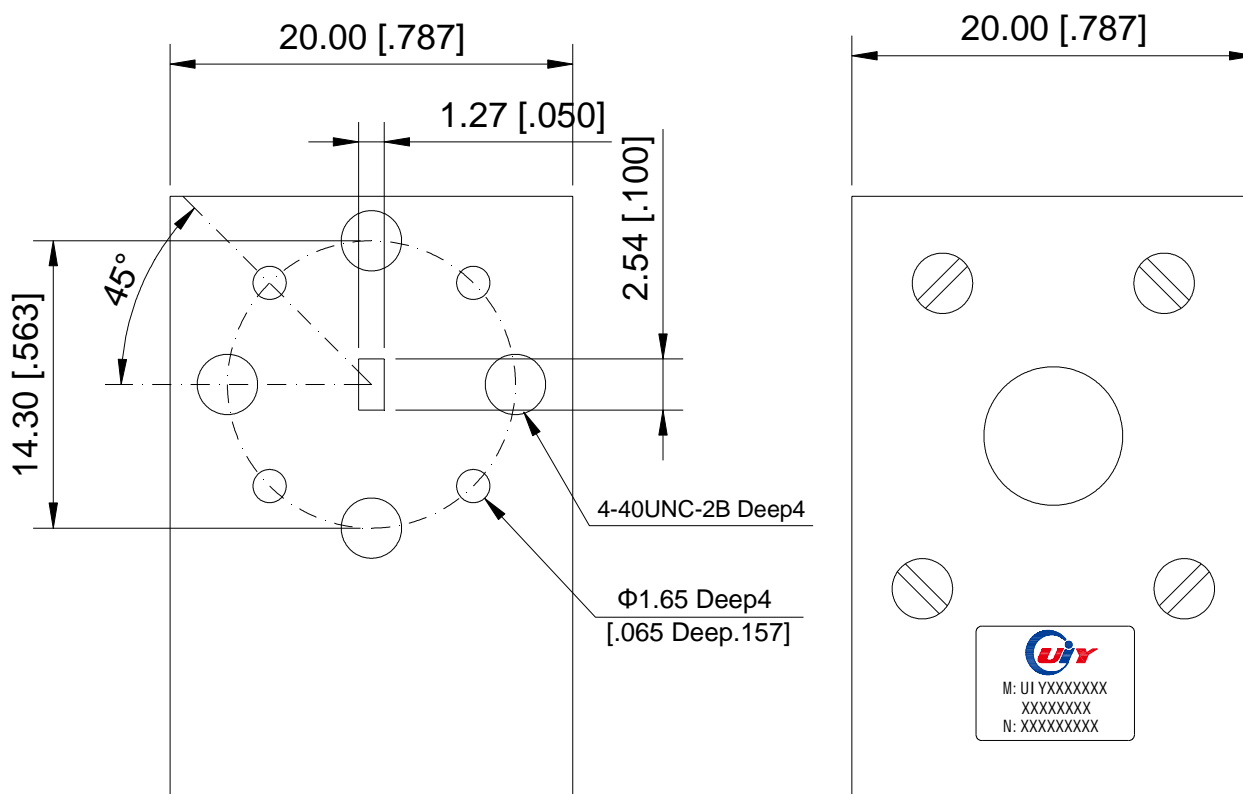

Unit: mm/ inch, General part tolerance is ±2% unless otherwise stated.

Ver. 5