

WR770 (BJ12) - Waveguide to Coaxial Adapter

Design Features

- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Freq.Range (MHz)	Insertion Loss Max(dB)	VSWR Max	Connector Type (Waveguide)	Connector Type (Coaxial)	CW Power (W)	Peak Power (KW)	Temp.(°C)
UIYWTCWR770A960T1450NF	960~1450	0.12	1.2	WR770 (BJ12)	N-F	100	3	-55 ~ +85
UIYWTCWR770A960T1450SF	960~1450	0.12	1.2	WR770 (BJ12)	SMA-F	100	3	-55 ~ +85
UIYWTCWR770A960T1450DF	960~1450	0.12	1.25	WR770 (BJ12)	7/16-F	100	3	-55 ~ +85


² Listed are specific frequency ranges and other tailor-made ranges are available.

² Please provide the below information when inquiring and mark * is required.

* 1. The specific frequency ranges.

2. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

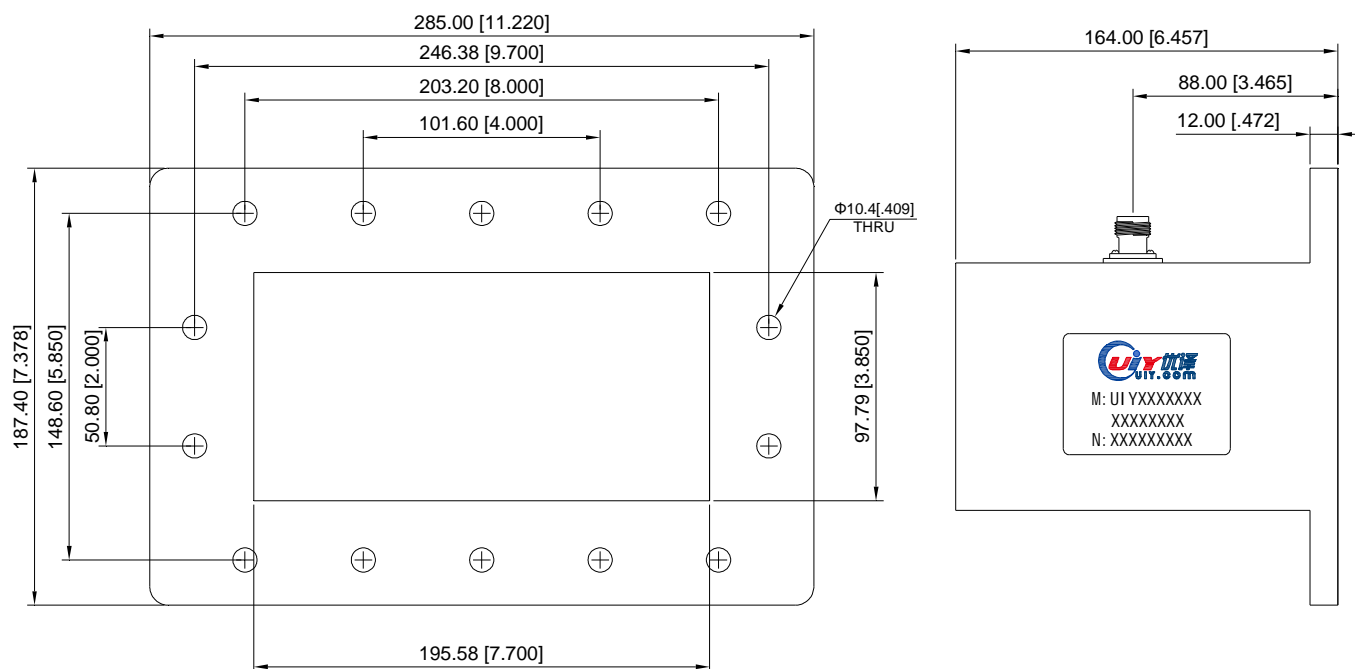

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.2

No. 8, Lane 1, Xintun East Zone, Longgang District, Shenzhen 518172, China.

Web: www.uiy.com

Tel: +86-755-83748888 +86-755-25999990

Fax: +86-755-25999959

E-mail: sales@uiy.com